

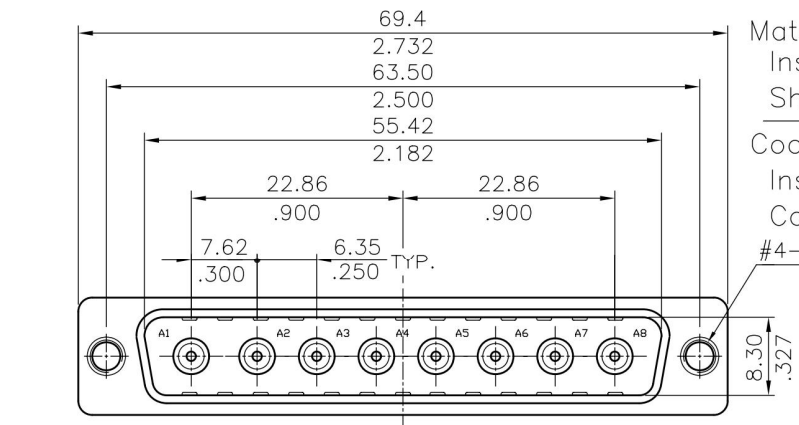
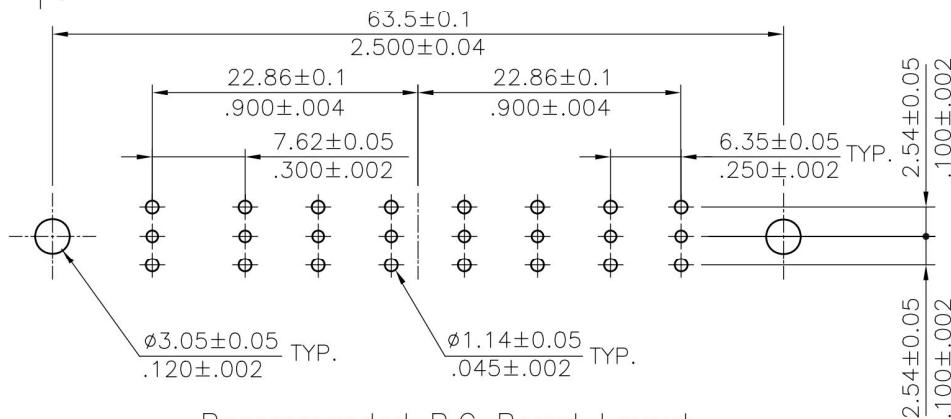




Material:
Insulator: Glass filled Polyester UL 94V-0
Shell: Steel, Tin plated as standard

Coaxial terminal
Insulator: Teflon UL 94V-0, Color white
Contact: Brass
#4-40 UNC TYP.2

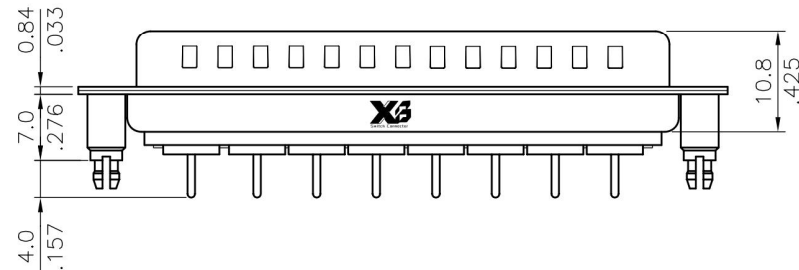

Recommended P.C Board Layout

Ordering Code

C8W8 P C V 3 0 1 75 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With Ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

Code	000	Code	B00	Code	C00	Code	D00
	DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: C8W8 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2				ENGINEER: David	10/19-01'	.X ± 0.30/.012 .X' ± 1'	FINISH:	
1				CHECKED BY: David	10/19-01'	.XX ± 0.20/.008 .X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'	.XXX ± 0.10/.004 .X' ±		
							DRAWING NO. C8W803SB	PART NO. C8W8PCV*0****00
							SCALE 2 / 1	SHEET 1 OF 1