


Ordering Code :

CXLT P S 3 75 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
 ② Connector type : P= Male
 ③ Contact type : S= Solder type
 ④ Contact Plating :
 2= 1.2μ" Gold plated over 50μ" Nickel
 3= 15μ" Gold plated over 50μ" Nickel (Standard)
 4= 30μ" Gold plated over 50μ" Nickel
 5= 50μ" Gold plated over 50μ" Nickel
 ⑤ Performance :
 50= 50 Ω
 75= 75 Ω
 ⑥ Other option :
 00= Standard

MATERIAL & FINISH :

NO.	DESCRIPTION	MATERIAL	PERFORMANCE	FINISH OR OTHER
A	Insulator	Teflon	50Ω / 75Ω	UL 94V-0 Color White
B	Outside contact	Brass	50Ω / 75Ω	Gold flash or Gold plated over 1.27μm(50μ") Nickel
C	Lock link	Brass	75Ω	Nickel plated
			50Ω	Gold flash
D	Center contact	Brass	50Ω / 75Ω	Gold flash or Gold plated over 1.27μm(50μ") Nickel
E	Inside sleeve	Brass	50Ω / 75Ω	Gold flash over 1.27μm(50μ") Nickel
F	Oudside sleeve	Brass	50Ω / 75Ω	Gold flash over 1.27μm(50μ") Nickel

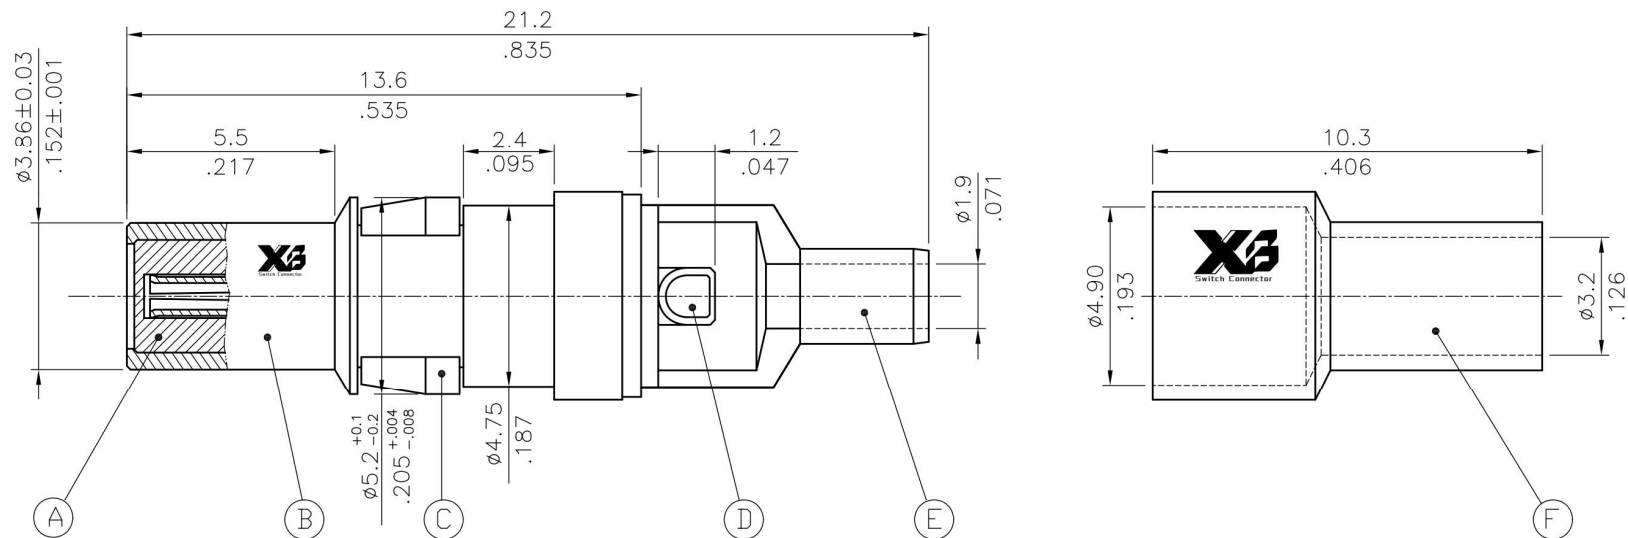

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: SOLDER TYPE MALE COAXIAL TERMINAL	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Sun	6/10-03'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER: David	6/11-03'	.X ± 0.10/.004 X' ± r	MATERIAL:	DRAWING NO. CXLT01SF	PART NO.	CXLTPS***00	
1				CHECKED BY: David	6/11-03'	.XX ± 0.05/.002 X' ±	FINISH:	SCALE 5 / 1	SHEET 1 OF 1		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	6/11-03'	.XXX ±	.XX' ±				