



Ordering Code :

CXLT S S 3 75 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Connector type : S= Female
③ Contact type : S= Solder type
④ Contact Plating :
2= 1.2μ" Gold plated over 50μ" Nickel
3= 15μ" Gold plated over 50μ" Nickel (Standard)
4= 30μ" Gold plated over 50μ" Nickel
5= 50μ" Gold plated over 50μ" Nickel
⑤ Performance :
50= 50 Ω
75= 75 Ω
⑥ Other option :
00= Standard

MATERIAL & FINISH :

NO.	DESCRIPTION	MATERIAL	IMPEDANCE	FINISH OR OTHER
A	Insulator	Teflon	75 / 50 Ω	UL 94V-0 Color White
B	Outside contact	Brass	75 / 50 Ω	Gold flash or Gold plated over 1.27μm(50μ") Nickel
C	Lock link	Brass	75 Ω	Nickel plated
			50 Ω	Gold flash
D	Center contact	Brass	75 / 50 Ω	Gold flash or Gold plated over 1.27μm(50μ") Nickel
E	Oudside sleeve	Brass	75 / 50 Ω	Gold flash over 1.27μm(50μ") Nickel

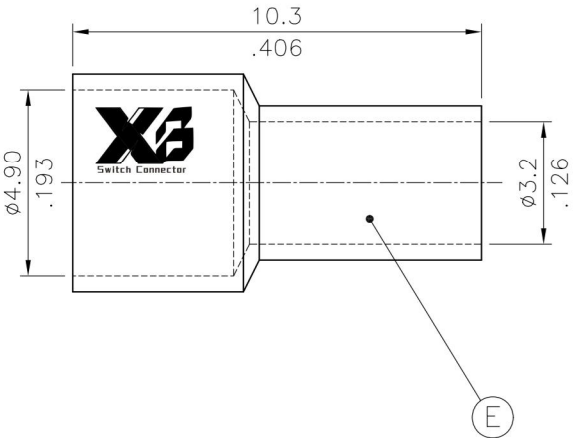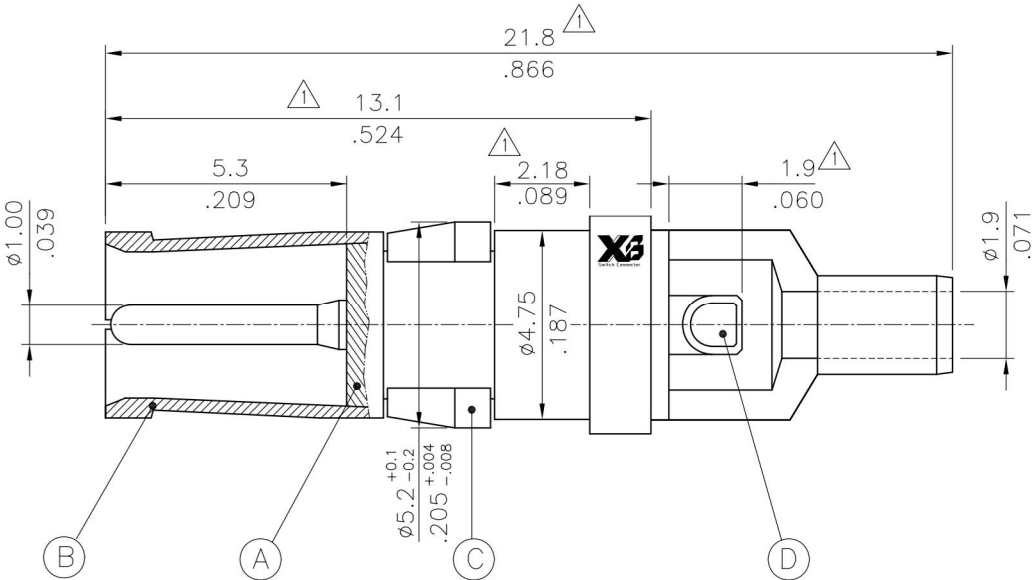

④					DATE	UNIT: mm / inch	TITLE: SOLDER TYPE FEMALE COAXIAL	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY:	Bill	6/14-07'	TERMINAL				
②				ENGINEER:	Eisley	6/14-07'	MATERIAL:	DRAWING NO.	CXLT02SG	PART NO.	CXLTSS***00
①	Bill	06/13-07	ECR07074-0/ECN070238	CHECKED BY:	David	6/15-07'	FINISH:	SCALE	5 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	6/15-07'					