

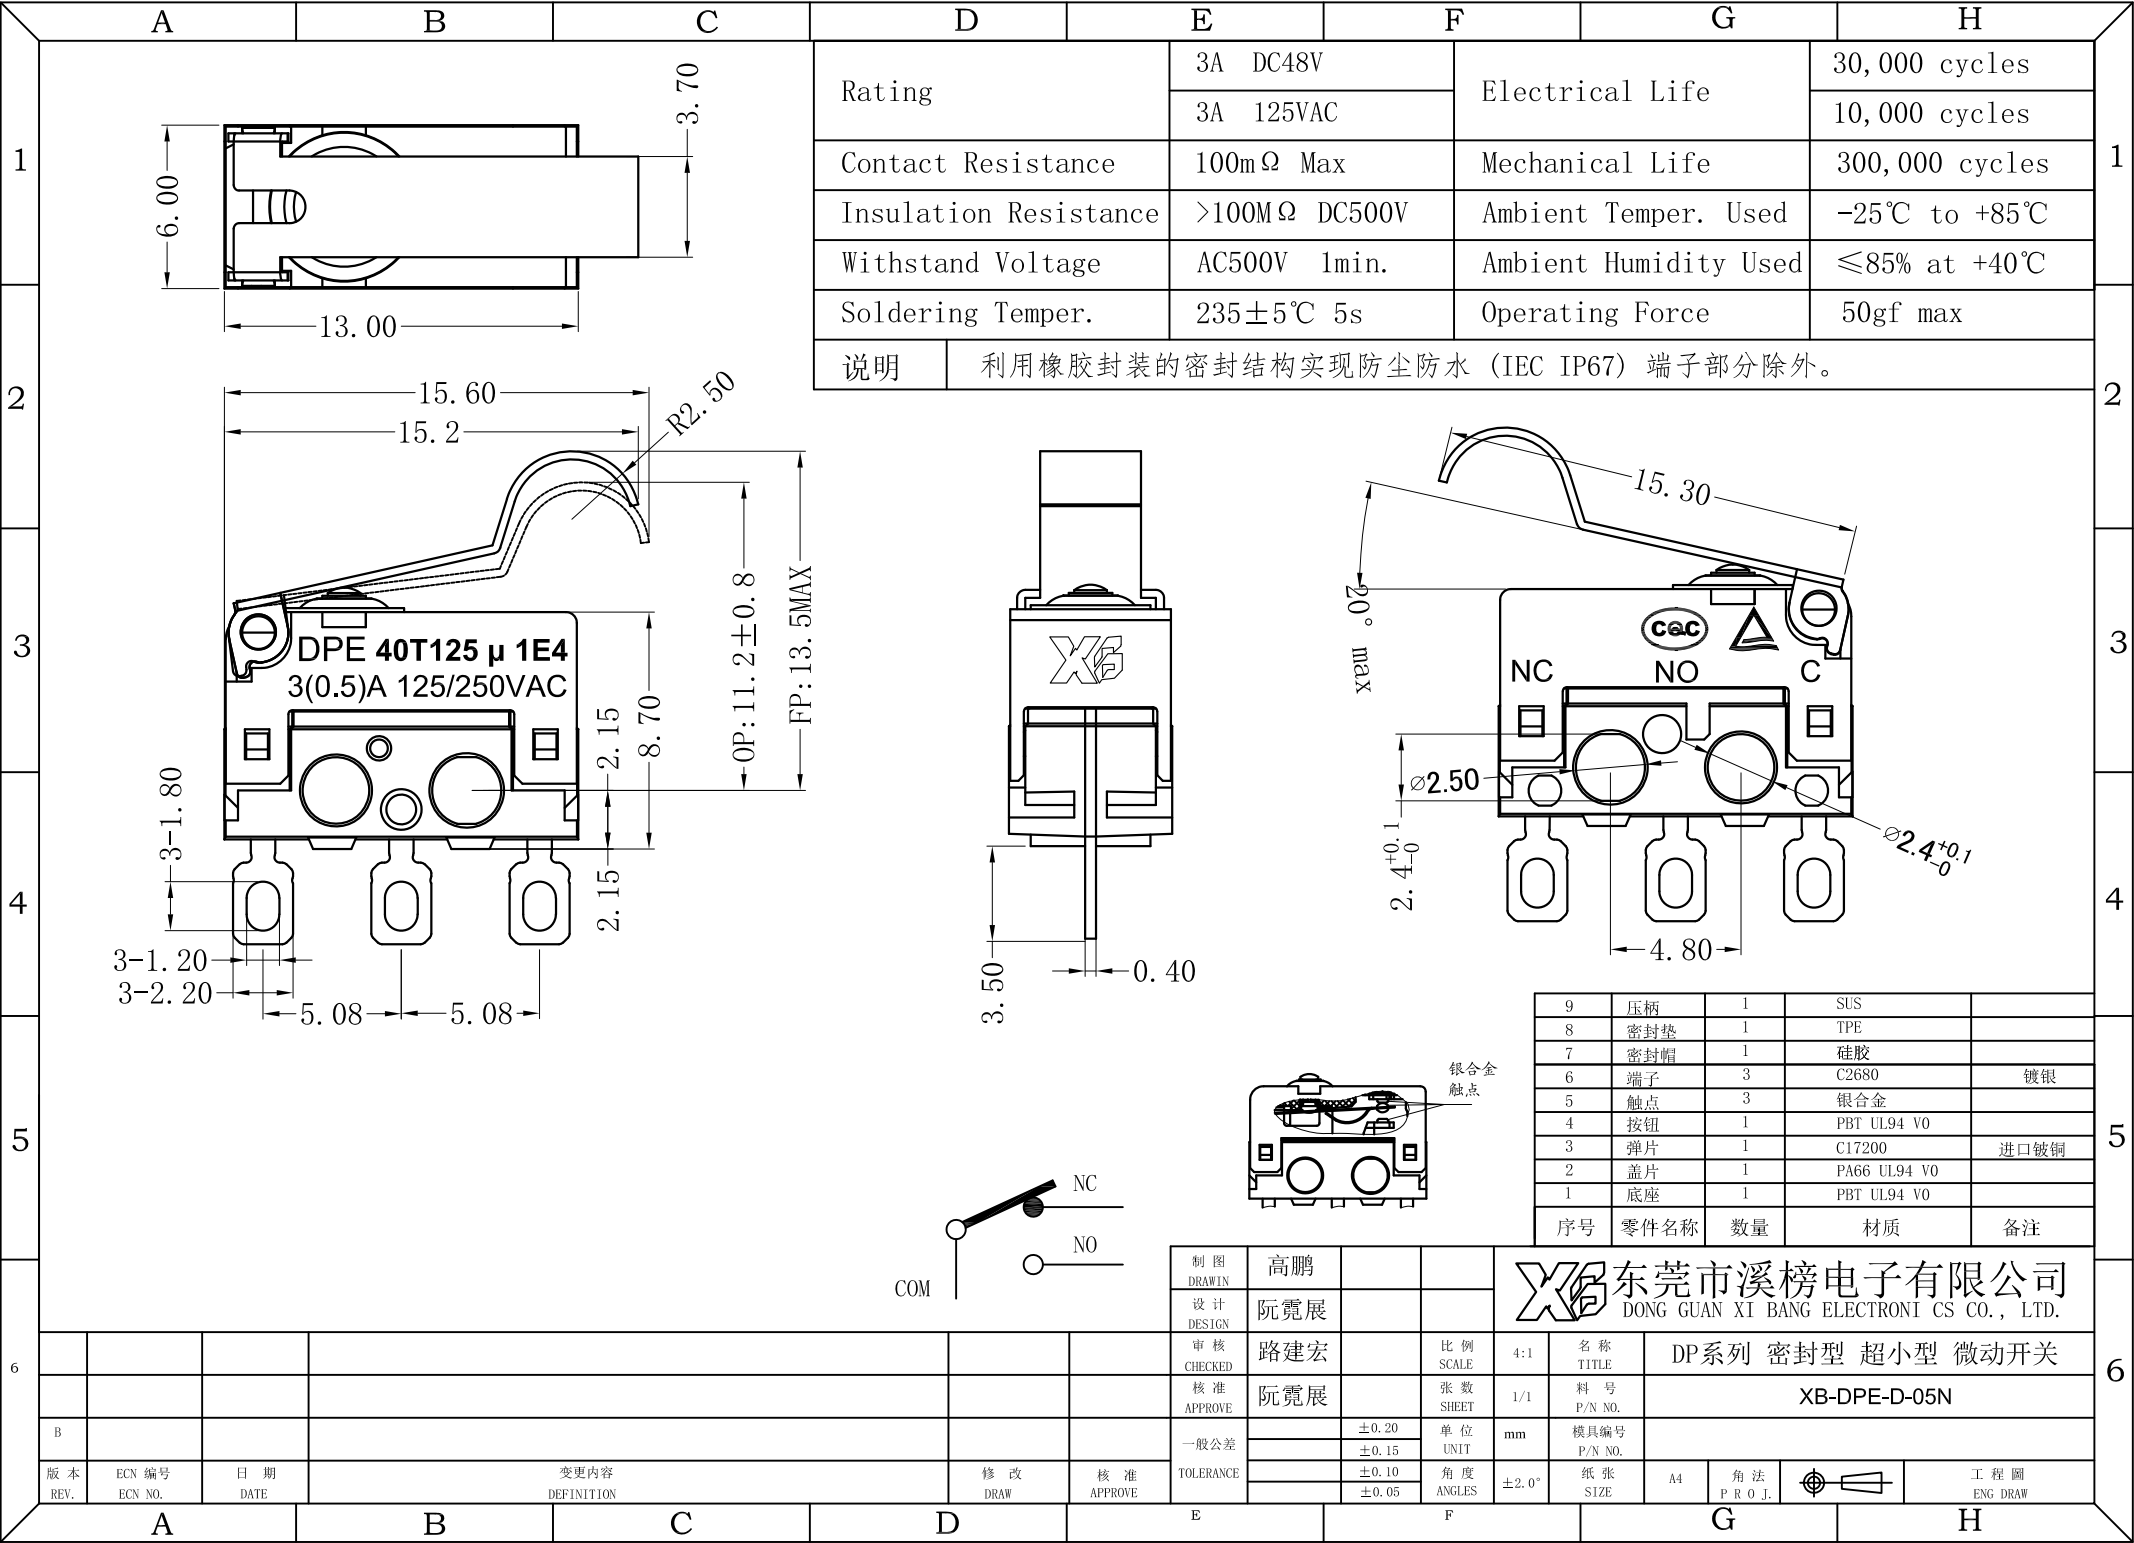




Rating	3A DC48V	Electrical Life	30,000 cycles
	3A 125VAC		10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	50gf max
说明	利用橡胶封装的密封结构实现防尘防水（IEC IP67）端子部分除外。		

9	压柄	1	SUS	
8	密封垫	1	TPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口镀铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注

制图 DRAWN	高鹏			XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
设计 DESIGN	阮宽展				
审核 CHECKED	路建宏		比例 SCALE	4:1	名称 TITLE
核准 APPROVE	阮宽展		张数 SHEET	1/1	料号 P/N NO.
一般公差 TOLERANCE		±0.20	单位 UNIT	mm	模具编号 P/N NO.
		±0.15			
		±0.10	角度 ANGLES	±2.0°	纸张 SIZE
		±0.05			
版本 REV.	ECN 编号 ECN NO.	日期 DATE	变更内容 DEFINITION	修改 DRAW	核准 APPROVE



B					
版本 REV.	ECN 编号 ECN NO.	日期 DATE	变更内容 DEFINITION	修改 DRAW	核准 APPROVE