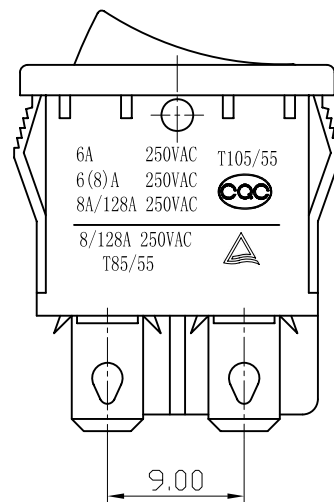
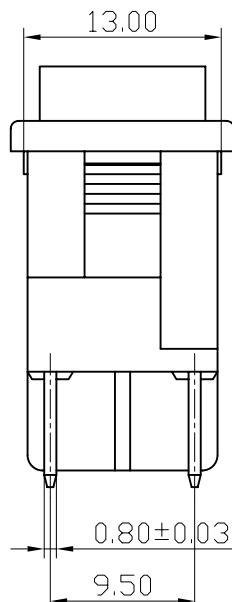
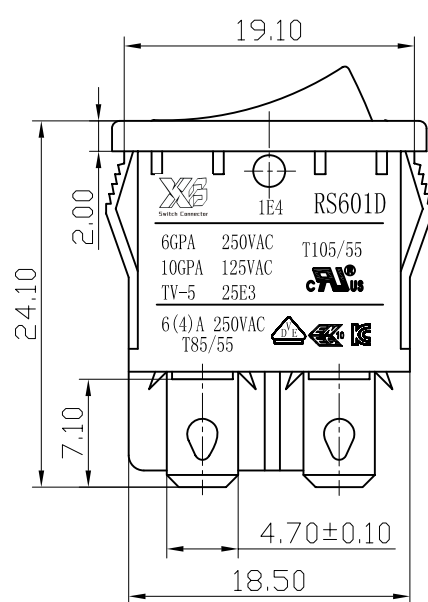


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	13.10~13.20	18.9~19.1
1.25~2.00	13.10~13.20	19.1~19.2
2.00~3.00	13.10~13.20	19.3~19.4

NOTES:

1.Rating:

CQC 6A 250VAC 6(8)A 250VAC

8A/128A 250VAC T105/55

UL cUL 6GPA 250VAC

10GPA 125VAC

T105/55 TV-5

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250VAC T85/55

TUV 8/128A 250VAC T85/55

2.Circuit Diagram:4P ON-OFF

3.Terminal Strength:≥80N


4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min
Terminals to Button:3000VAC 1min
Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7.Insulation resistance:≥100MΩ

8.Body Materil:NYLON 66 94V-0~2



A4				普通公差：		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	跷板开关	比 例	Free
A1				ABOVE 5 TO 30	±0.30	绘 图	周 金 勇	核 对	梁 金 勇	型 号	RS601D		
				ABOVE 30	±0.50	DRAWN BY		CHECKED BY		MODEL NO.			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期	2015.9.1	核 准	周 培 雷	图 号	RS601D-2010011BB		
						DATE		APPROVAL BY		DWG NO.			