

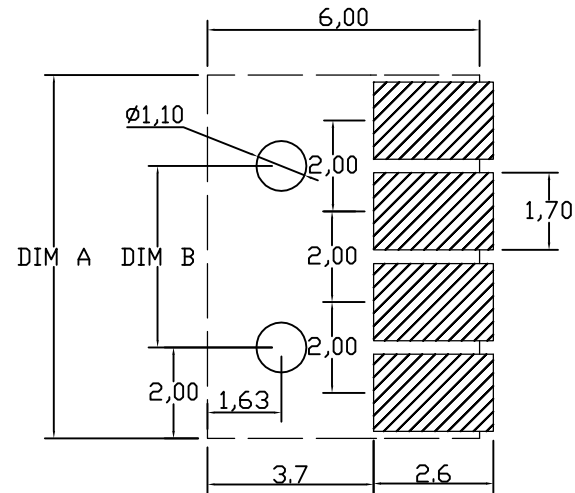
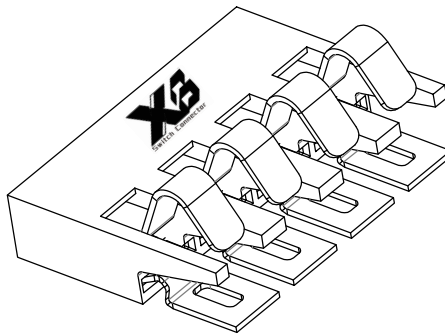
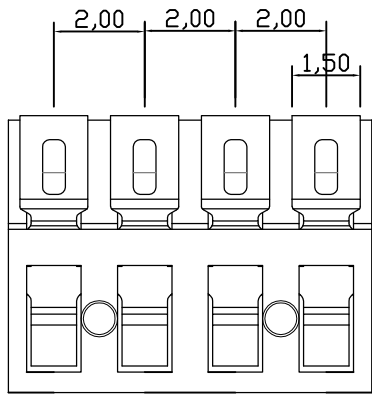
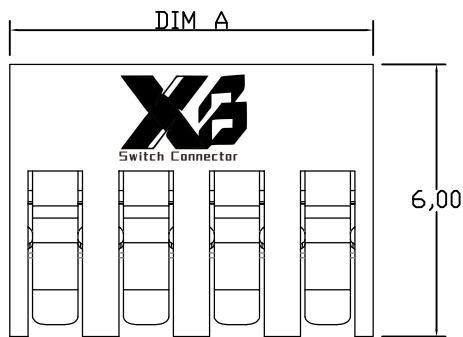


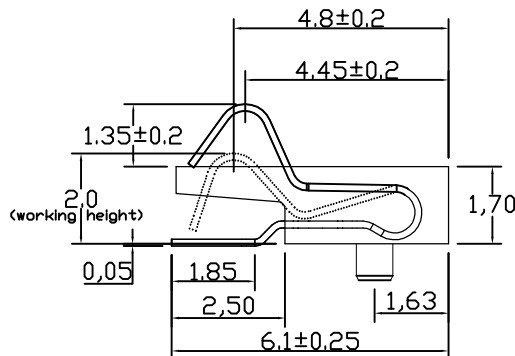

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX $\pm$ 0.05)

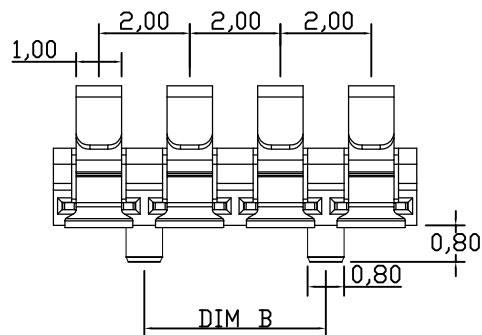

性能:

额定电流: 2.0A
额定电压: 12V
耐电压: 500V
接触电阻: 30m Ω
绝缘电阻: 500M Ω
工作温度: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C
塑件 (材质): LCP
接触点 (材质): 磷铜, 镀金

Pin数	PART NO.	DIM A	DIM B
3Pin	XB-BC-12-3PD170	6.0	2.0
4Pin	XB-BC-12-4PD170	8.0	4.0
5Pin	XB-BC-12-5PD170	10.0	6.0
6Pin	XB-BC-12-6PD170	12.0	8.0
7Pin	XB-BC-12-7PD170	14.0	10.0
8Pin	XB-BC-12-8PD170	16.0	12.0

版本REV.	更版标记REVISION	NOTE	日期DATE	未注公差 TOLERANCE	
				X. $\pm$ 0.35	
				X.X $\pm$ 0.25	
绘制DRAWN	高鹏	X.XX $\pm$ 0.15			
设计DES'D	庞东	X.XXX $\pm$ 0.05			
审核CHK'D	贺龙飞	视图方法 PROJECTION			
批准APPV'D	杨军	比例SCALE:			
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD					品名ARTICLE: 弹片电池座连接器 Bullet Batteryholderconnector
图号MODEL: XB-BC-12系列有柱					A4
单位UNIT: mm					页码SHEET: 共1页 第1页