

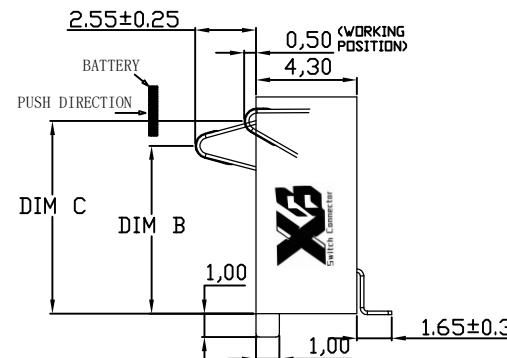
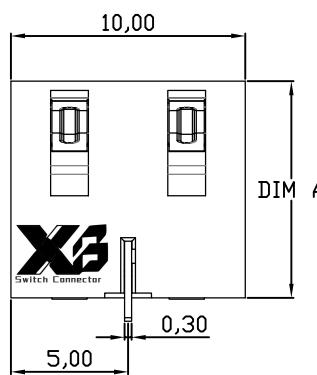



1 2 3 4 5 6 7 8

ROHS



性能:

额定电流: 3.0A

额定电压: 12V

耐电压: 500V


接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ

工作温度: -40°C ~ +85°C

塑件 (材质): LCP黑色

接触点 (材质): 铜合金, 触点镀金3U"

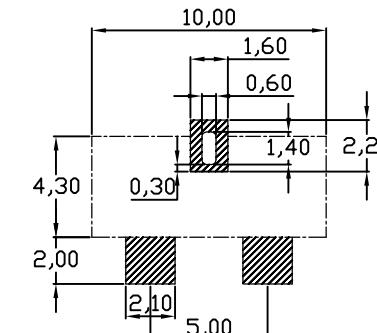

RECOMMENDED PCB LAYOUT  
TOP VIEW (. XX±0.05)

规格料号	DIM A	DIM B	DIM C
XB-BC-19-2P800-C10	8.00	5.70±0.3	6.85±0.3
XB-BC-19-2P925-C10	9.25	6.95±0.3	8.10±0.3
XB-BC-19-2P1050-C10	10.50	8.20±0.3	9.35±0.3

版本REV.	更版标记	REVISION	NOTE	日期	DATE	未注公差	TOOLTOLERANCE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
						x. . ±0.35		
						X.X . ±0.25		
绘制DRAWN	高鹏			X.XX .	±0.15			
设计DES'D	庞东			X.XXX .	±0.05			
审核CHK'D	贺龙飞			视图方法	PROJECTION			
批准APPV'D	杨军			○				
				比例SCALE:		单位UNIT: mm		页码SHEET: 共1页 第1页