

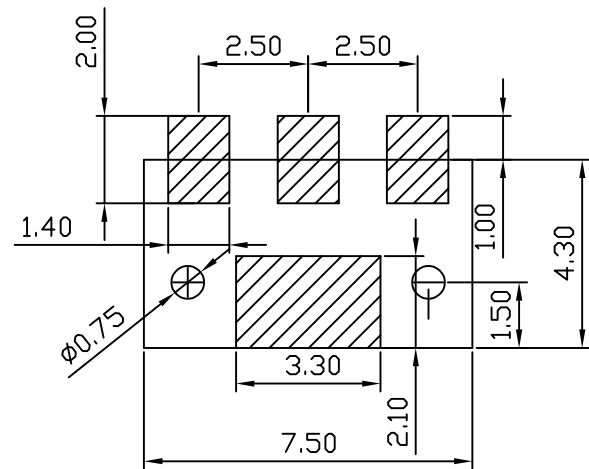
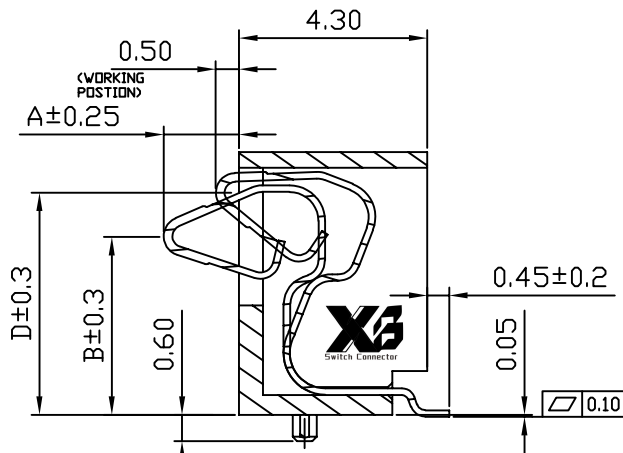


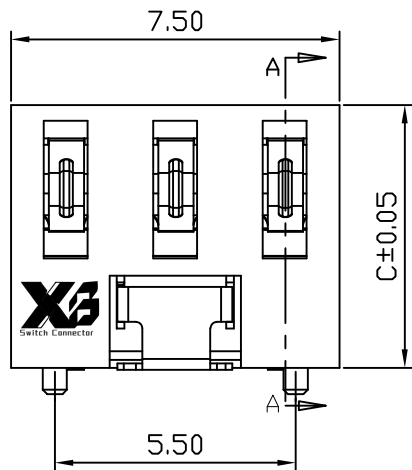

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX ± 0.05)

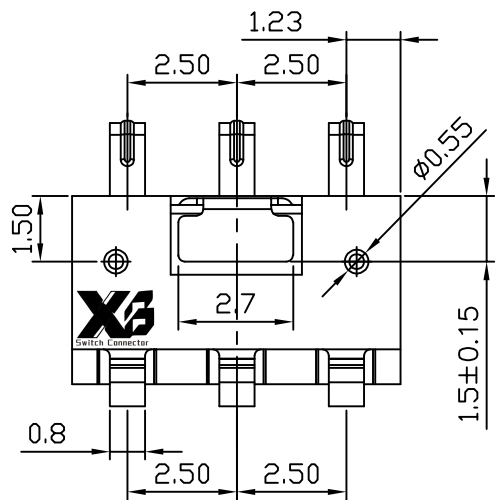


SECTION A-A

PART NO.	A	B	C	D
XB-BC-7-3PD600	1.85	4.5	6.0	5.2
XB-BC-7-3PD700	1.85	5.5	7.0	6.2

性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金

版本REV.	更新标记REVISIONNOTE	日期DATE	未注公差 TOLERANCE		 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD	
			X. ±0.35	X. ° ±4°		
			X.X ±0.25	X.X' ±3'		
			X.XX ±0.15	X.XX ±2'		
绘制DRAWN	高鹏		X.XXX ±0.05	X.XXX ±1'	品名ARTICLE:	
设计DES'D	庞东		视图方法 PROJECTION		弹片电池座连接器	
审核CHK'D	贺龙飞				Bullet Batteryholderconnector	
批准APPV'D	杨军				图号MODEL:	
			比例SCALE:		XB-BC-7-3PD	
			单位UNIT: mm		A4	
			页码SHEET: 共1页 第1页			