


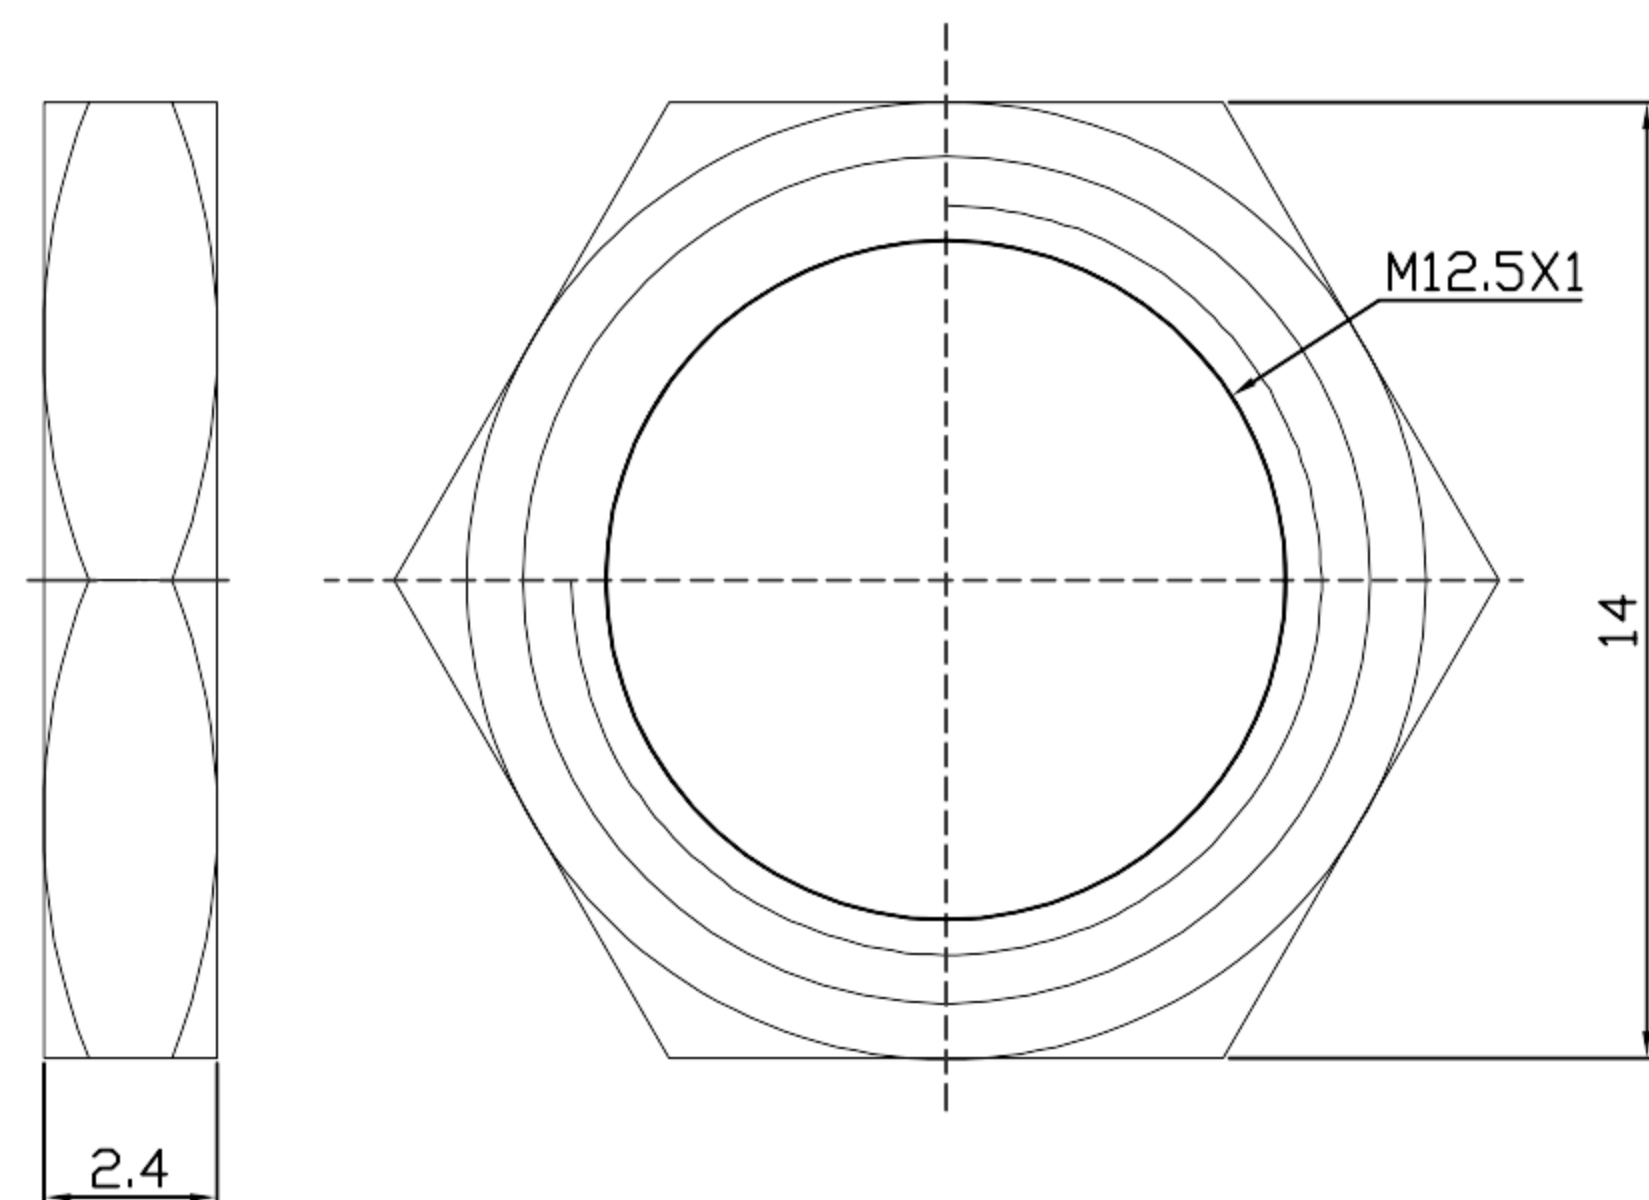
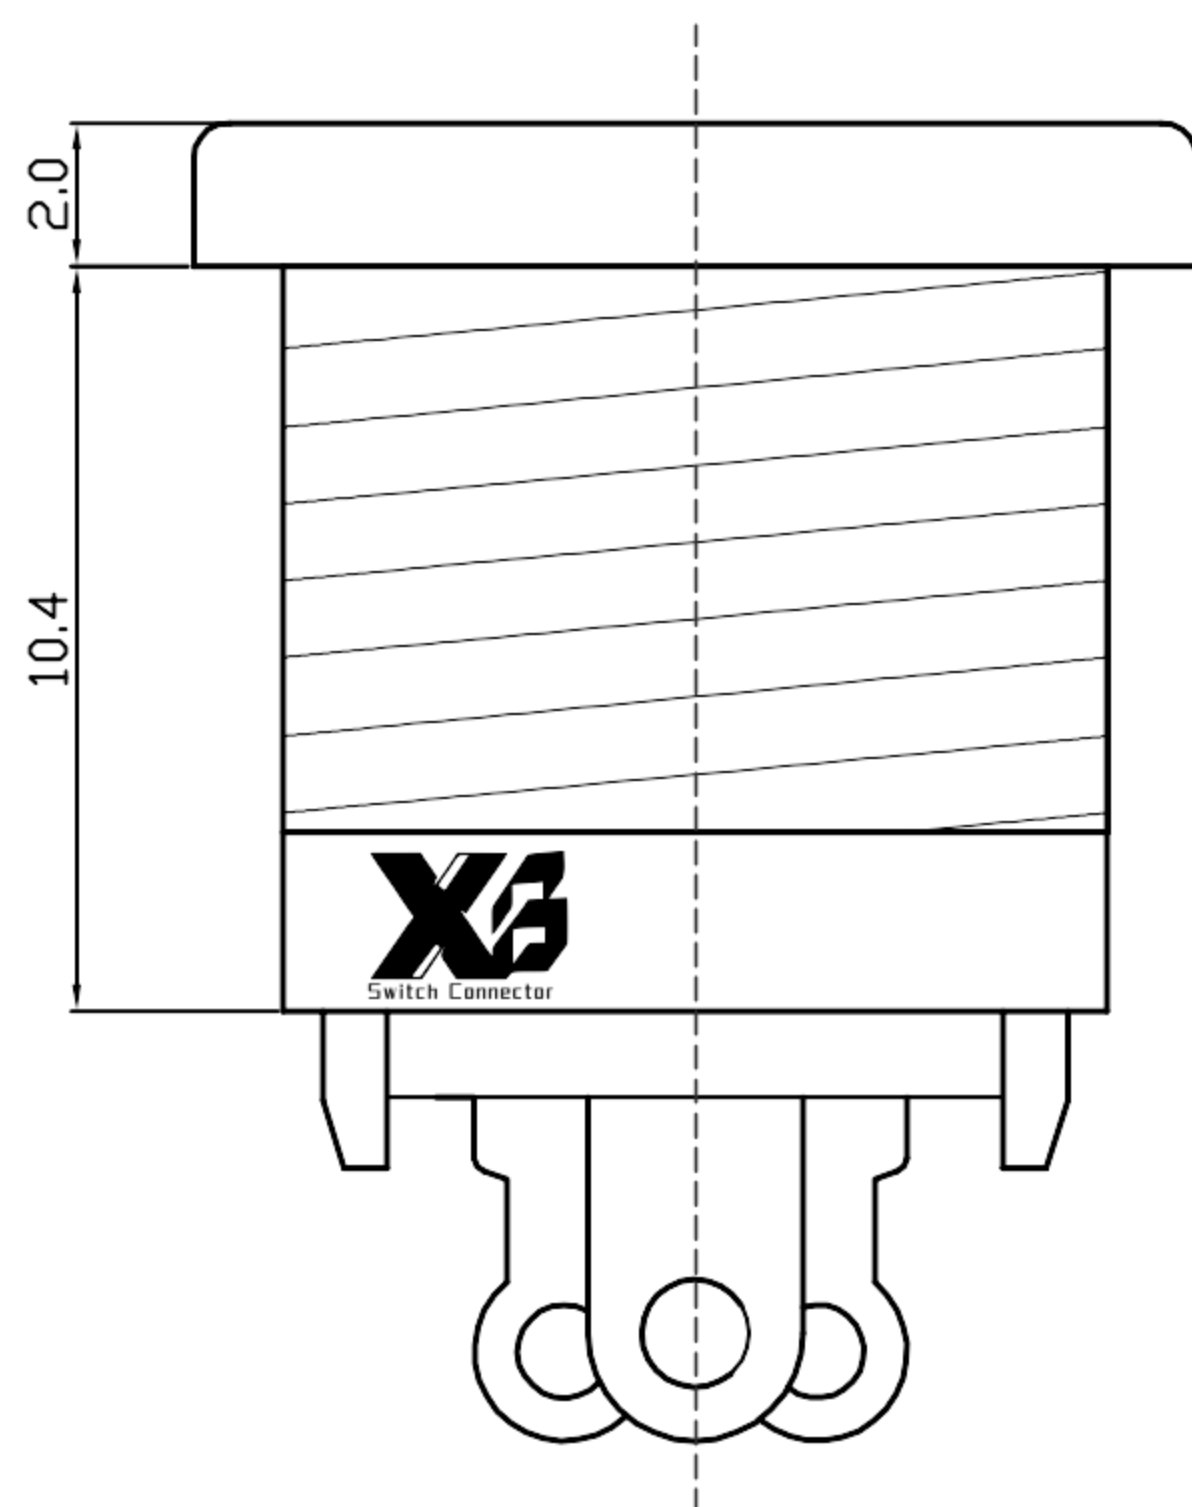
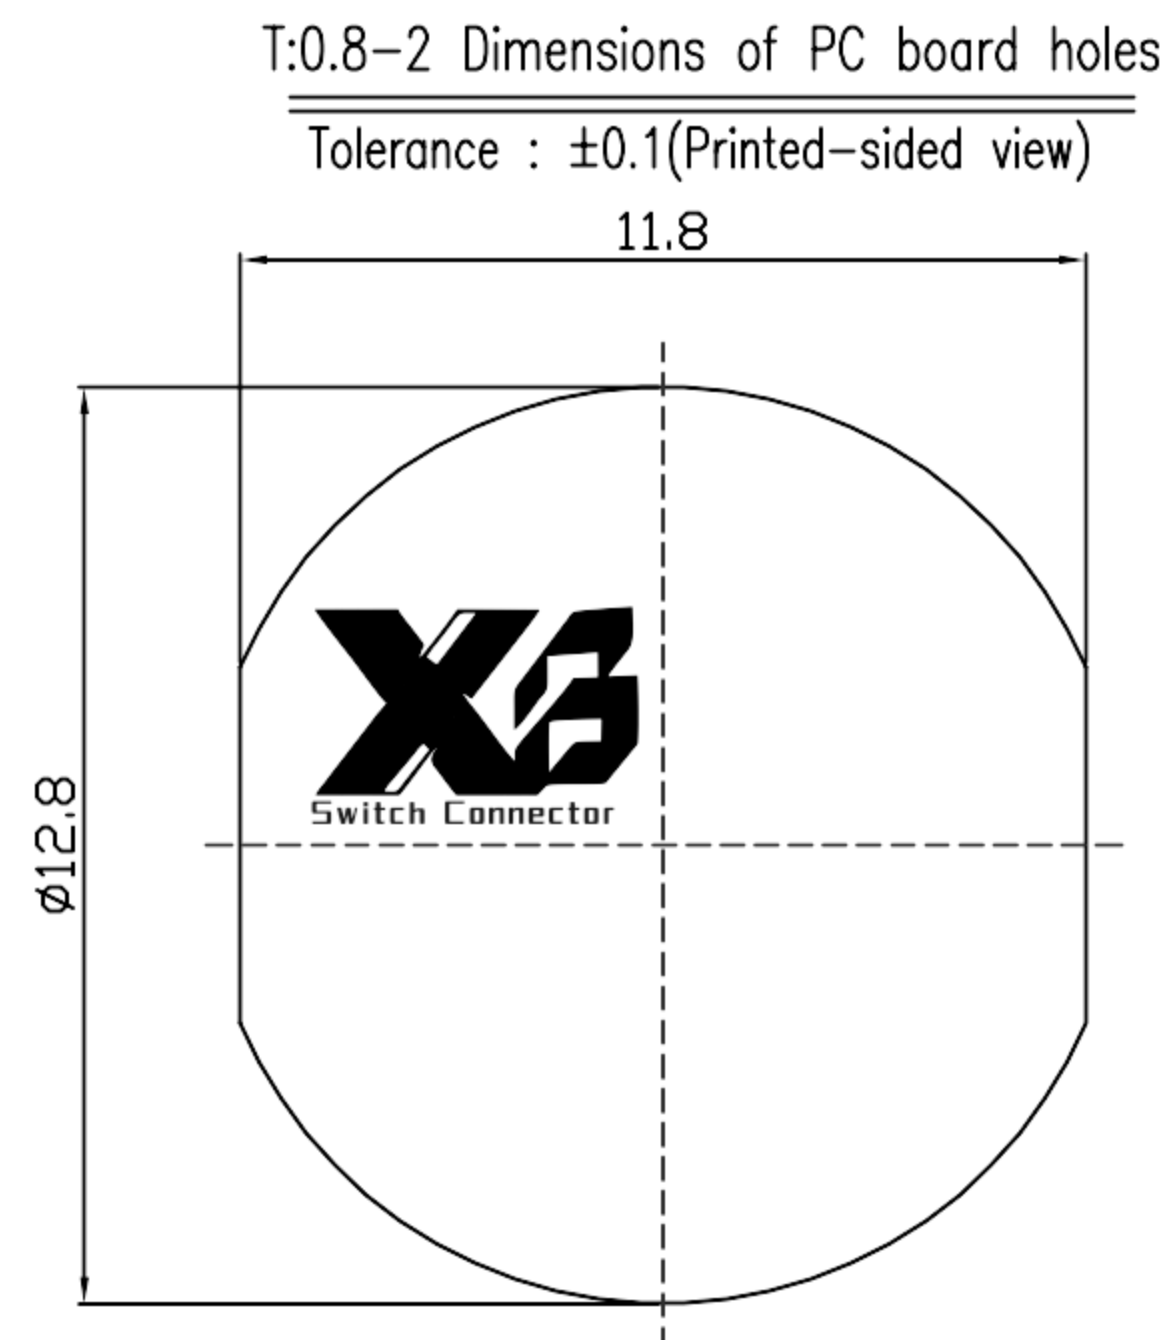
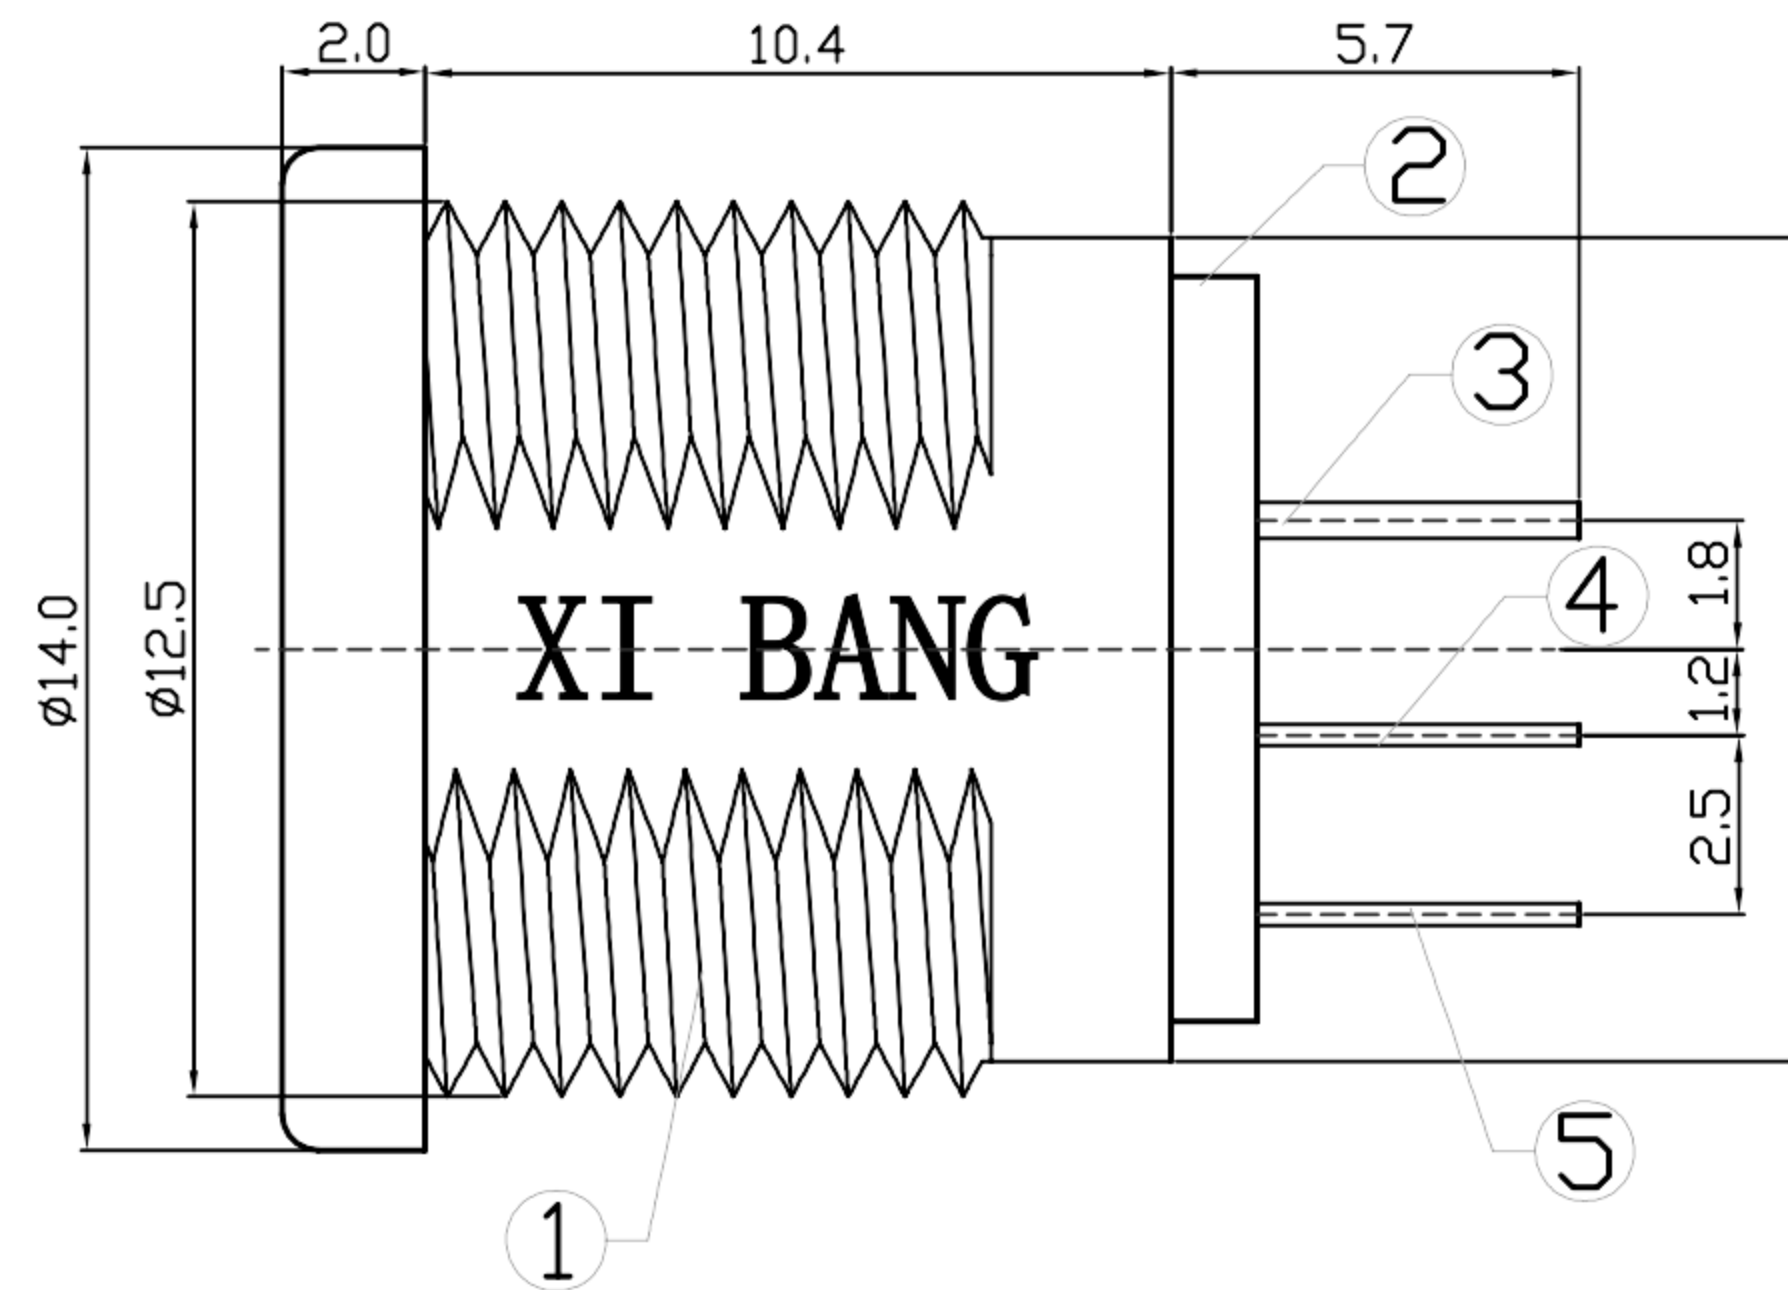


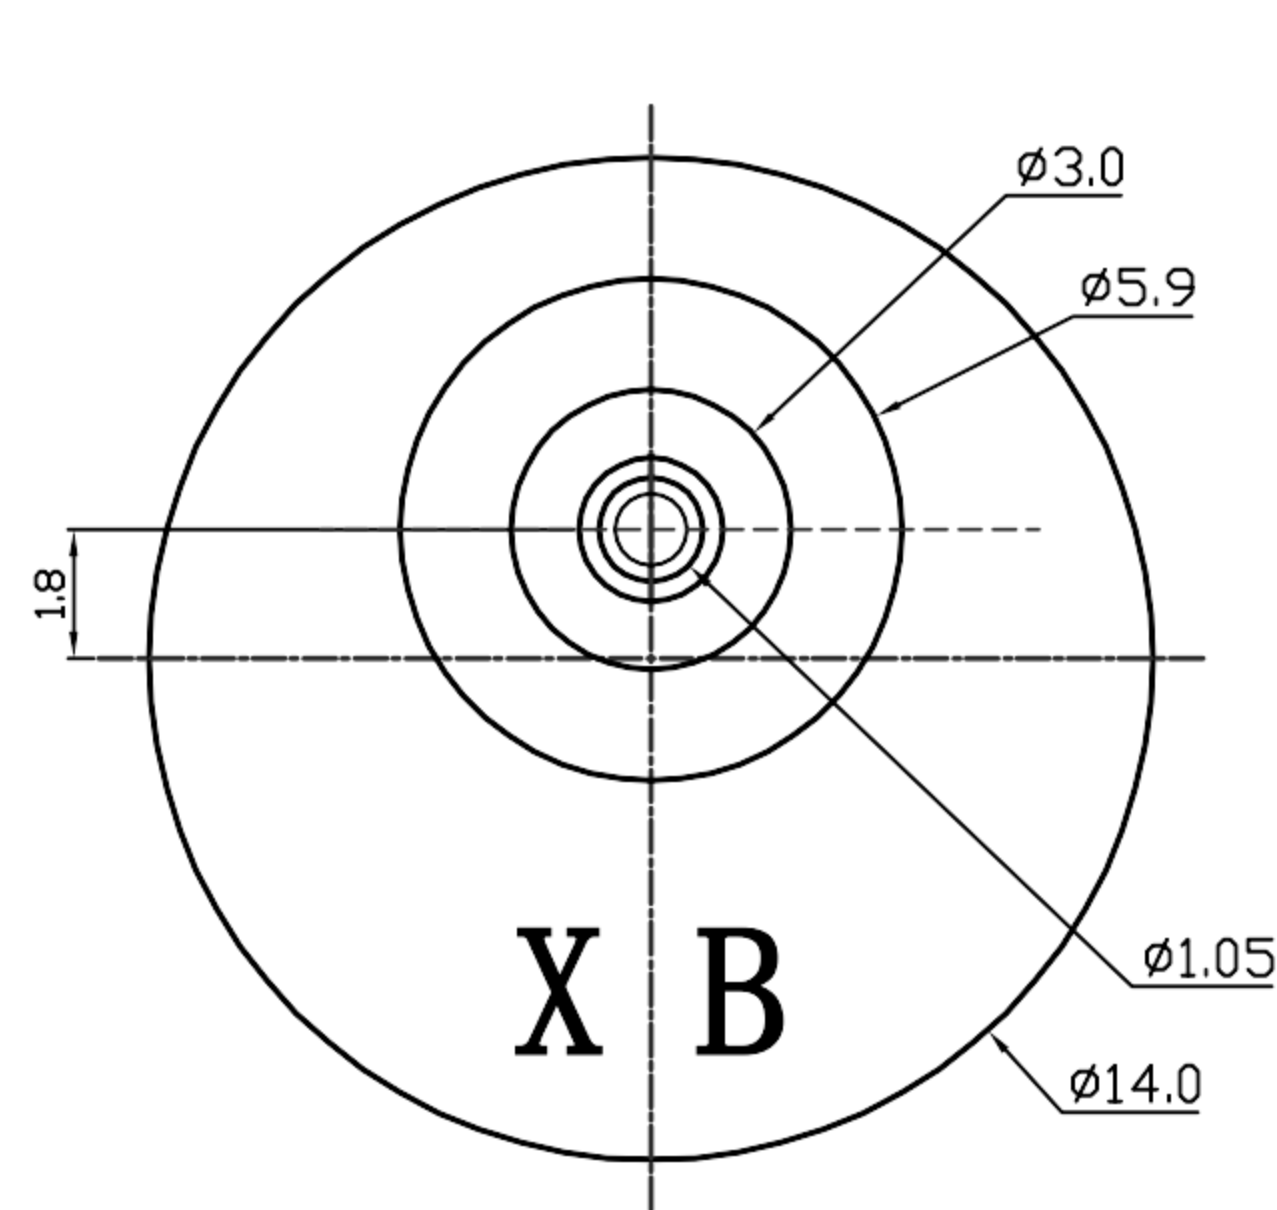

DC MATE PLUG

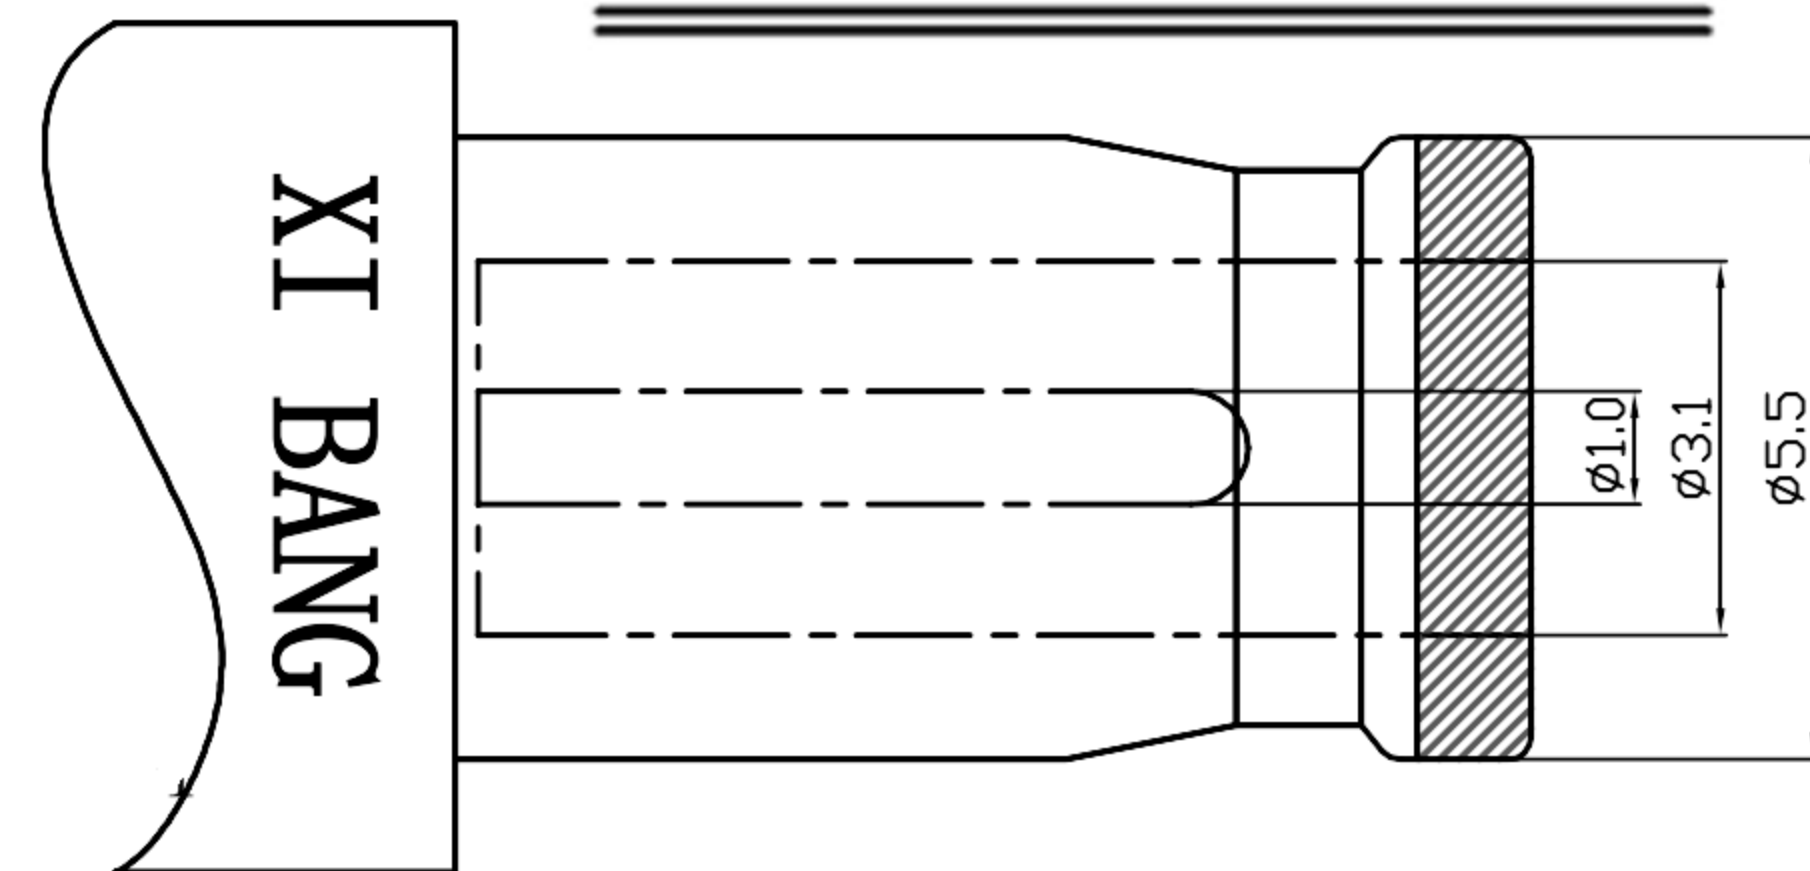



CIRCUIT DIAGRAM

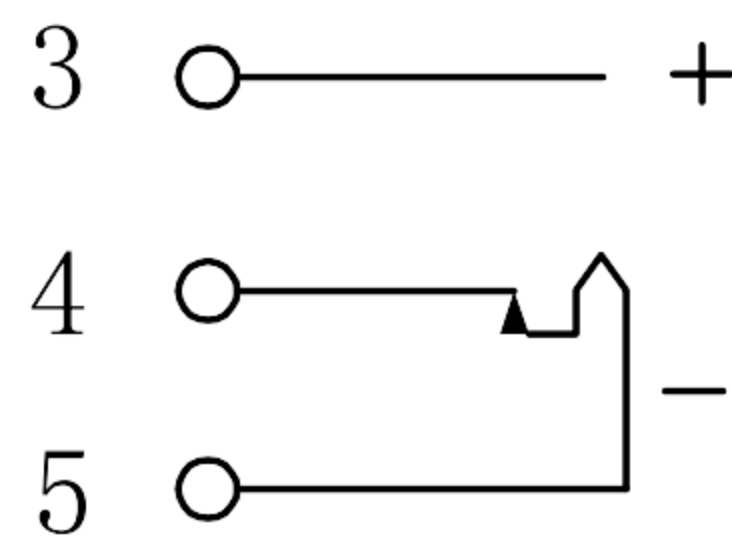

SPECIFICATION

- 1.Rating : DC 12V 30V , 3.0A 5.0A
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

6	XB-DC-022-1.0 -6	螺帽	1PCS	锌合金	镀锡	环保
5	XB-DC-022-1.0 -5	5号脚	1PCS	C5191磷铜=0.3	镀锡	环保
4	XB-DC-022-1.0 -4	4号脚	1PCS	C5210黄铜=0.3	镀锡	环保
3	XB-DC-022-1.0 -3	3号脚	1PCS	C5210黄铜=0.5	镀锡	环保
2	XB-DC-022-1.0 -2	盖子	1PCS	PBT (BLACK)	黑色	环保
1	XB-DC-022-1.0 -1	塑料座	1PCS	PBT (BLACK)	黑色	环保
序号	零件图代号	名 称	数量	材 料	镀层/颜色	备 注

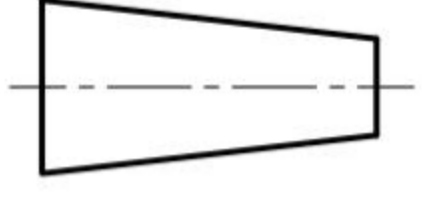						东莞市溪榜电子有限公司											
						DONG GUAN XI BANG ELECTRONICS CO., LTD											
						TITLE : XB DC Power Jack											
MODEL : XB-DC-022-1.0																	
UNIT : MM		DWN.	ZENQ. CHEN	DATE						6	PIN	BRASS		1	Ni PLATED		
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE						5	TERMINAL	BRASS STRIP	t=0.3	1	Ag PLATED		
VERSION 01		APPD.	FEI. LONG. HE	DATE						4	SPRING TERMINAL C	PBS STRIP	t=0.25	1	Ag PLATED		
						TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3		ANGLE TOL ± 2°		3	TERMINAL B	BRASS STRIP	t=0.3	1	Ag PLATED		
										2	TERMINAL A	BRASS STRIP	t=0.3	1	Ag PLATED		
										1	HOUSING	PBT UL94-V0		1	BLACK		
										NO.	PART NAME	MATERIAL		QTY.	FINISHING		