

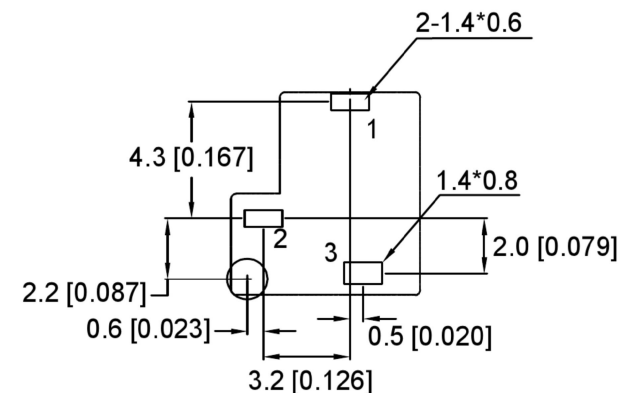
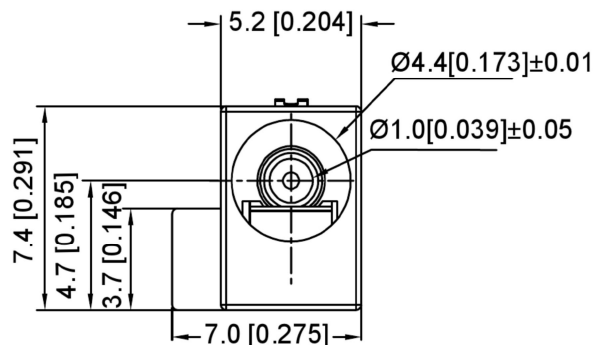
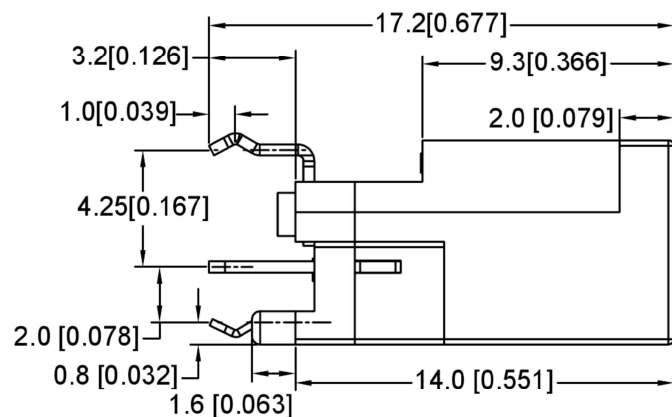
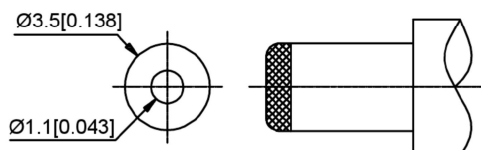


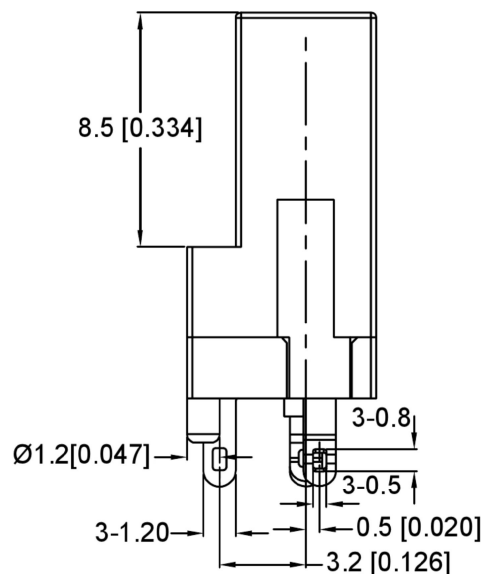

PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05

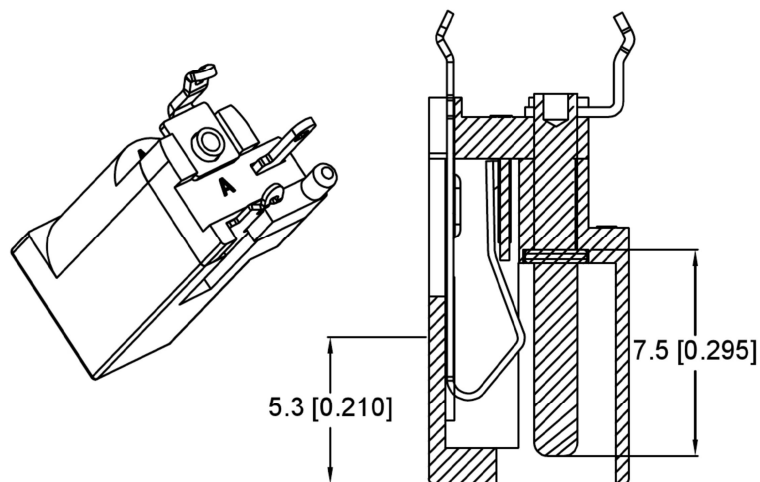

SCHEMATIC	
Center Pin	Ø1.0 mm
	Ø1.3 mm
	Ø1.65 mm

NOTES:

注释:

- CONTACT CURRENT RATING: 1A.
触点额定电流: 1A.
- CONTACT RESISTANCE: 50MΩ MAX.;
接触电阻: 最大 50MΩ.
- INSULATION RESISTANCE: 100MΩ MIN,
绝缘电阻: 100MΩ MIN.
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
耐介质: 最小 500V AC.
- DURABILITY: 5,000 CYCLES MIN.
耐久性: 每分钟 5000 次循环.
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
连接器配合力: 最大 29.4N (3.00Kgf).
- CONNECTOR UNMATING FORCES: 4.94N (0.50Kgf) MIN.,
连接器脱离力: 最小 4.94N (0.50Kgf).

	MATERIAL	PLATING
center pin	Brass	tin
terminal 1	Brass	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
plastic	Pbt	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN		VIEW:	PART NO.: DC-002H-2.5A-1.0
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0