


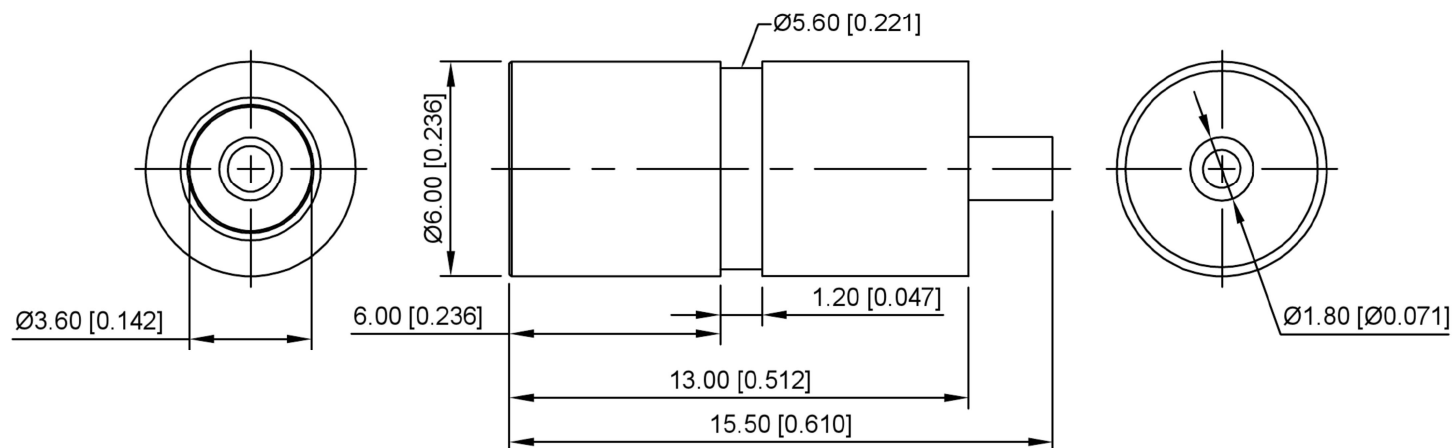

Technolo Request:

1.Outlook:

N0 burr,no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ;

b:Endure voltage:


AC500V at 1 minute;

c:Contact resistance:

Under 30MΩ;

3.Insertion fore & withdrawal force;0.3-3kgf.

4.Salt spray test :24H.

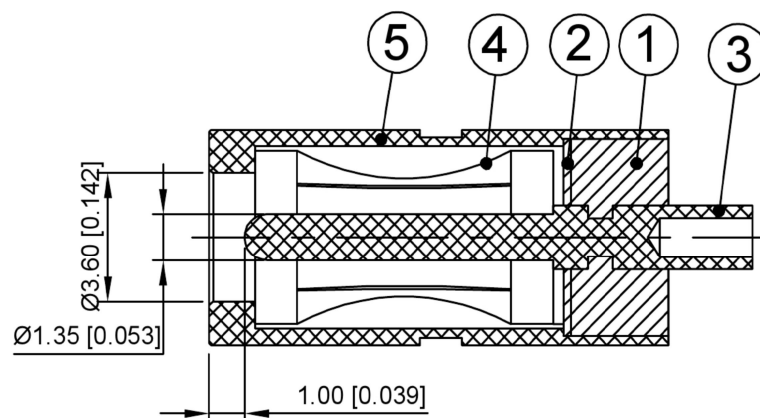

	MATERIAL	PLATING
plastic	PA9T	Black
silicone pad		
terminal	C3604	NI
Spring	phosphor bronze	NI
Waterproof tube	C3604	NI

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK				
							DWN		VIEW: 	PART NO.: DC-F1460				
							CHKD		UNIT: mm/in	DWG NO.:				
							APPD		SIZE: A4					
REVISIONS						UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxjdz.com www.xbswitch.com								DONG GUAN XI BANG ELECTRONIC CO., LTD						
								WEIGHT		SHEET		REVISION		
										1/1		A0		