
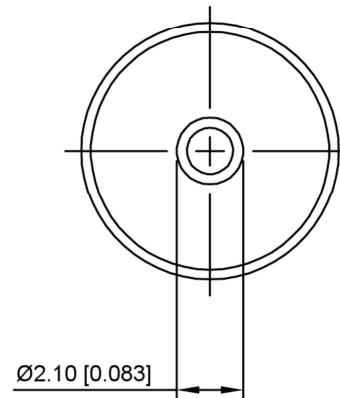
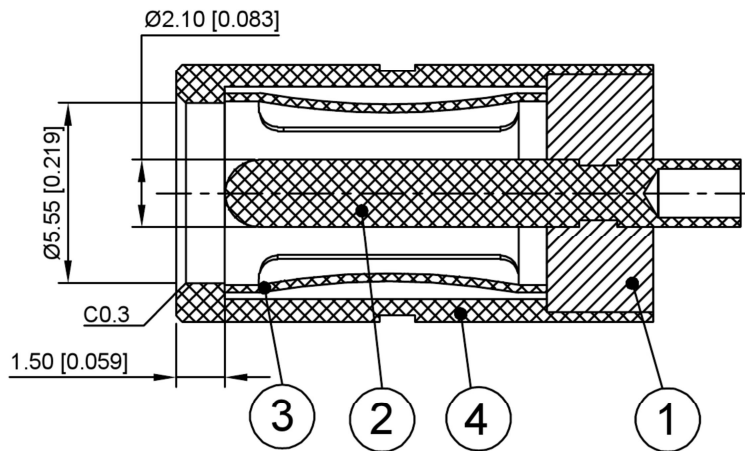
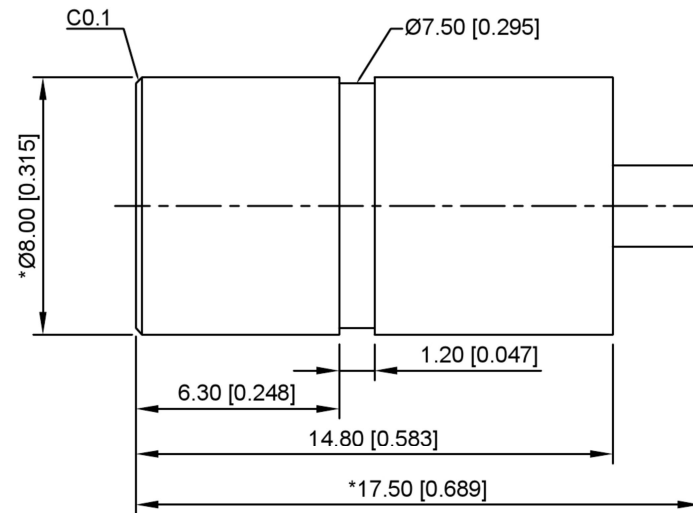


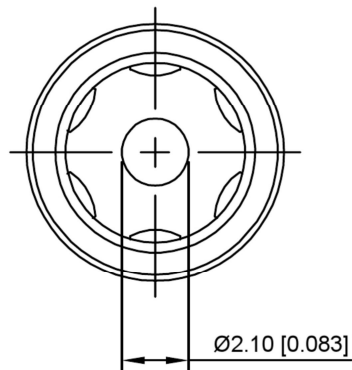

Technolo Request:

1.Outlook:

N0 burr,no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ ;

b:Endure voltage:

AC500V at 1 minute;

c:Contact resistance:

Under 30MΩ ;

3.Insertion fore & withdrawal force;0.3-3kg

4.Salt spray test :24H.

	MATERIAL	PLATING
plastic	PBT	Black
terminal	C3604	NI
Spring	phosphor bronze	NI
Waterproof tube	C3604	NI
silicone pad		

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: DC-F2180		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16	±0.3		APPD		SIZE: A4			
				16 < L ≤ 63	±0.4							
				L > 63	±0.5							
				DATE	REVISED	APPROVED						
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION	
										1/1	A0	