

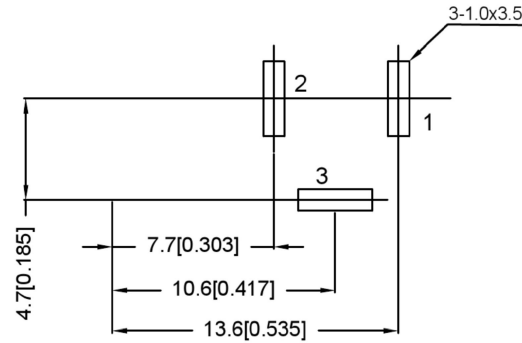
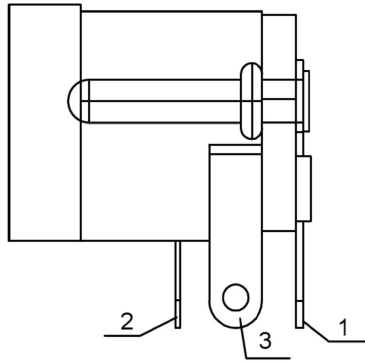

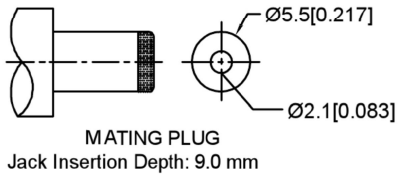



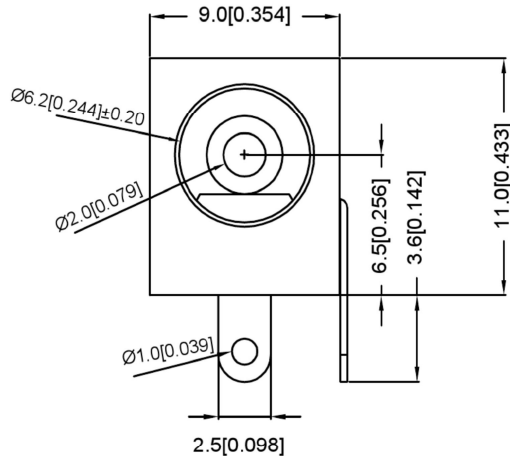

PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

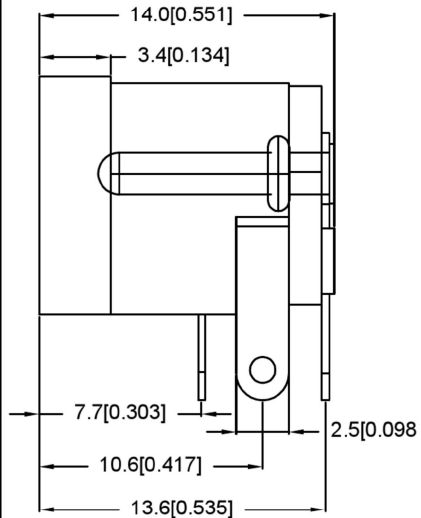

SPECIFICATIONS:

规格:

1.ELECTRICAL CHARACTERISTICS:

电气特性:

1-1.RATING:

等级:

1-2. CONTACT RESISTANCE:30MΩ MAX.(INITIAL)

接触电阻: 最大30MΩ (初始)

1-3. DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE

介质耐受电压: 500V AC FOR ONE MINUTE

1-4. INSULATION RESISTANCE:100MΩ MIN. MEASURED BY 500V DC

绝缘电阻: 500V直流电测得的最小值为100MΩ

2. MECHANICAL CHARACTERISTICS:

机械特性:

2-1. INSERTION FORCE:0.3~3.0 KGF

插入力: 0.3~3.0 KGF

2-2. WITHDRAWAL FORCE:0.3~3.0 KGF

拔出力: 0.3~3.0 KGF

3. UFE TEST:5,000 CYCLES MIN.

UFE试验: 至少5000次循环。

4.FOR REFLOW SOLDERING LEAD-FREE PROCESS.


用于回流焊无铅工艺。

5.REPRESENT CRITICAL DIMENSIONS.

表示关键尺寸

SCHEMATIC	
Model	DC-005
Center Pin	2.0
	2.5
	3.0

	MATERIAL	PLATING
center pin	Brass	silver
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver
plastic	Pbt	

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK			
							DWN		VIEW: 	PART NO.: DC-005-5A-2.0			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				