

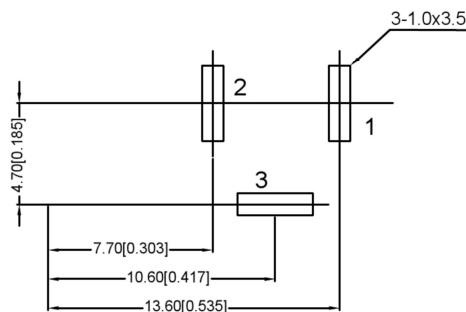
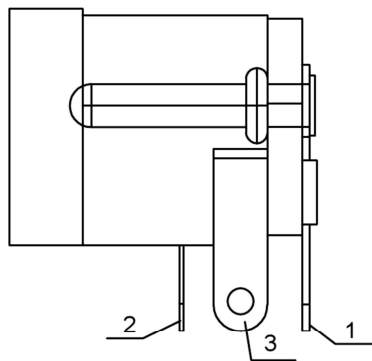

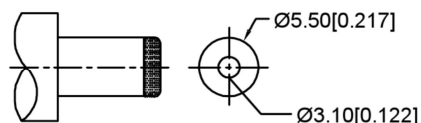



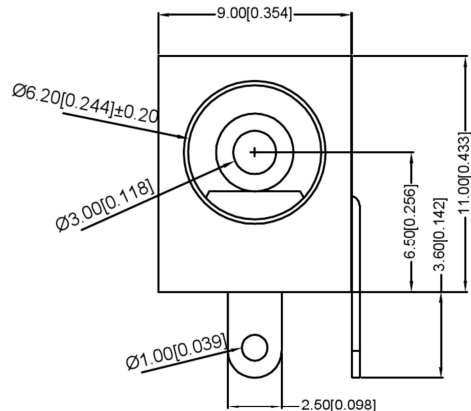

PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

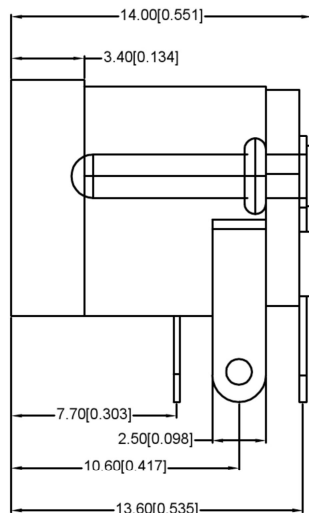

MATING PLUG
Jack Insertion Depth: 9.0 mm

SCHEMATIC	
Model	DC-005-5A
Center Pin	Ø2.0mm
	Ø2.5mm
	Ø3.0mm

SPECIFICATIONS:

规格:

1. ELECTRICAL CHARACTERISTICS:

电气特性:

1-1.RATING:

评级:

1-2. CONTACT RESISTANCE:30mΩ MAX.(INITIAL)

接触电阻: 最大30mΩ (初始)

1-3. DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE

介质耐受电压: 500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

绝缘电阻: 500V直流电测得的最小值为100MΩ

2. MECHANICAL CHARACTERISTICS:

机械特性:

2-1. INSERTION FORCE:0.3~3.0 KGF

插入力: 0.3~3.0 KGF

2-2. WITHDRAWAL FORCE:0.3~3.0 KGF

拔出力: 0.3~3.0 KGF

3. LIFE TEST:5,000 CYCLES MIN.

寿命试验: 至少5000次循环。

4.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

用于回流焊无铅工艺。

	MATERIAL	PLATING
center pin	Brass	silver
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver
plastic	Pbt	

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK				
							DWN		VIEW: 	PART NO.: DC-005-5A-3.0				
							CHKD		UNIT: mm/in	DWG NO.:				
							APPD		SIZE: A4					
REVISIONS												WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com						UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0