
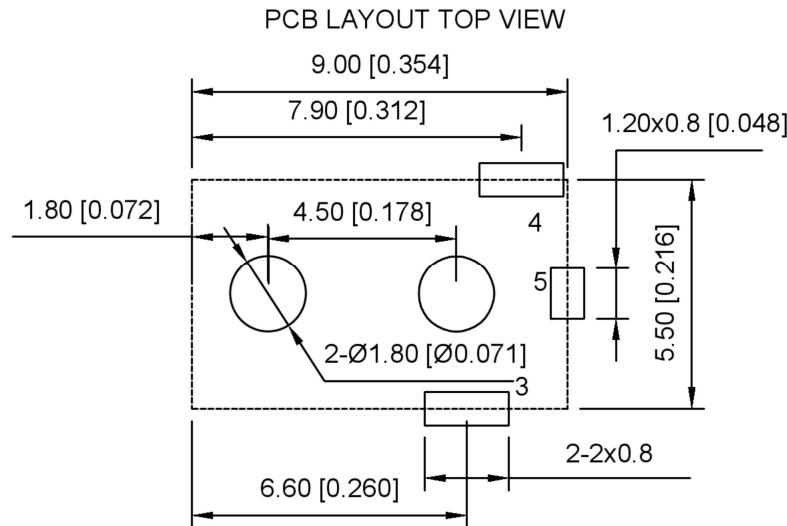
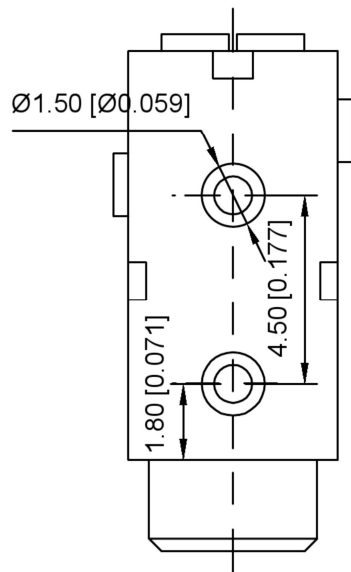
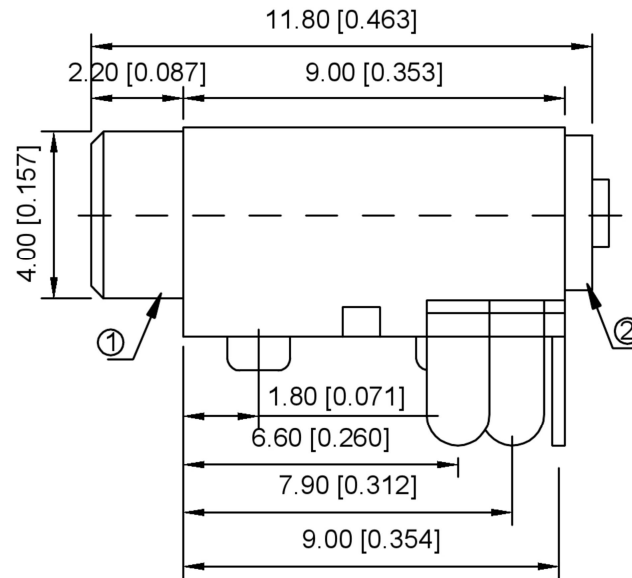
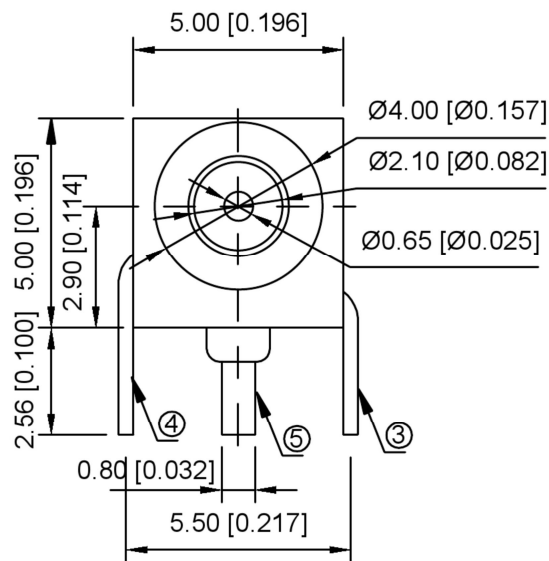


SCHEMATIC



SPECIFICATION

规格

1. Rating: DC 30V, 2A

额定值: 直流 30V, 2A

2. Contact resistance: $\leq 0.02\Omega$

接触电阻: $\leq 0.02\Omega$

3. Insulation resistance: 100m Ω

绝缘电阻: 100m Ω

4. Withstand voltage: 250V/min

耐压: 250V/min

5. Insertion and extraction force: 3-15N

插拔力: 3-15N

6. life: 5, 000 cycles

寿命: 5, 000次循环

5	Terminal	1	Brass	Plating silvering
4	Terminal	1	Brass	Plating silvering
3	Terminal	1	Phosphor copper	Plating silvering
2	Cover	1	PBT	-
1	Plastic	1	PBT	-
LTR	PART NAME	1	MATERIAL	PLATED

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	DC POWER JACK
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	DC-011-2.0A-0.65
			DWG NO.:
			WEIGHT
			SHEET
			REVISION
			1/1
			A0