
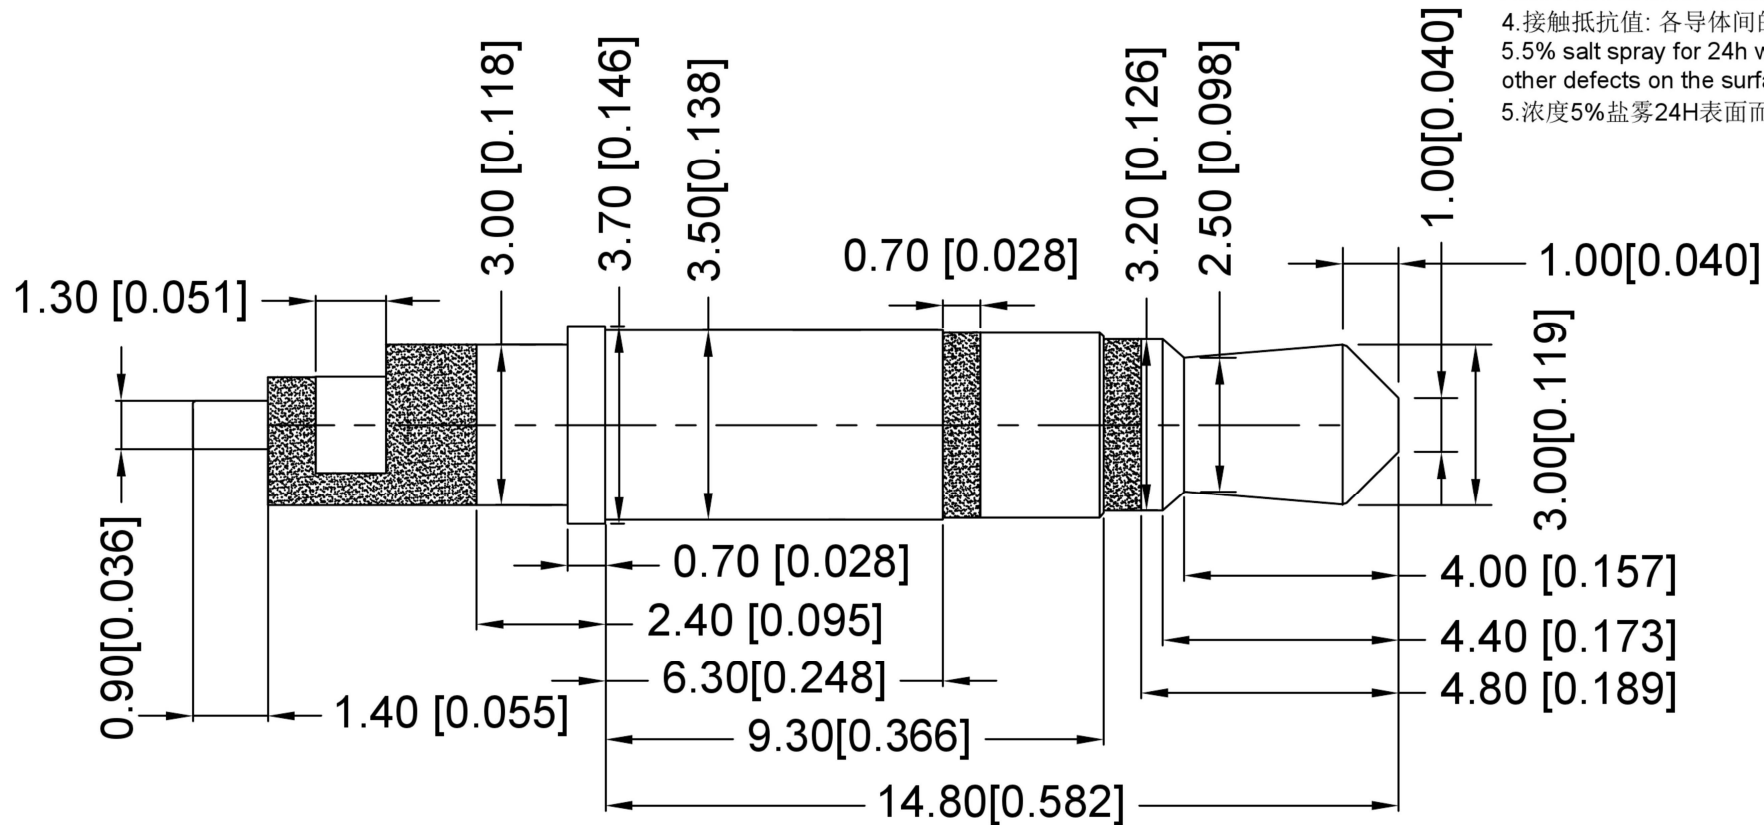


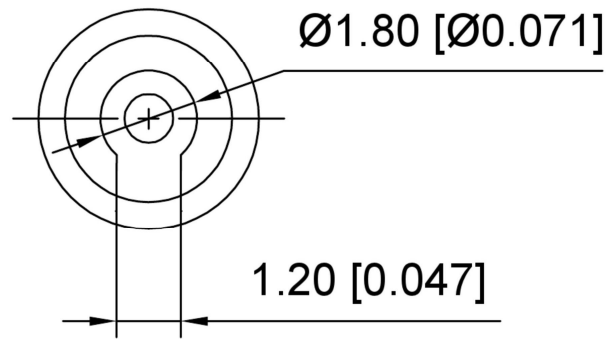

technical standard:

技术标准:

1.Appearance: the surface of all parts shall be clean without rust, burr, crack or other mechanical damage

1. 外观: 各部件表面应清洁,不得有锈蚀、毛刺、裂纹或其他机械损伤.

2.Insulation endurance: each conductor shall be able to withstand Ac500V for 1 minute without current breakdov and arcing

2.绝缘耐力: 各导体间应能受AC500V,1分钟的作用,而无电流击穿和飞弧现象

3.Insulation resistance: above DC 500 V, 100m Ω

3. 绝缘电阻:在 DC 500 V,100M Ω 以上

4.Contact resistance value: the maximum contact resistance between conductors is 30m Ω

4.接触抵抗值: 各导体间的接触电阻最大为30m Ω .

5.5% salt spray for 24h without erythema, oxidation and other defects on the surface

5. 浓度5%盐雾24H表面而无红斑及氧化等不良。

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PT-35373J148B
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET
			REVISION
			1/1
			A0

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
www.alpsr.com				
www.gdxdz.com				
www.xbswitch.com				

