
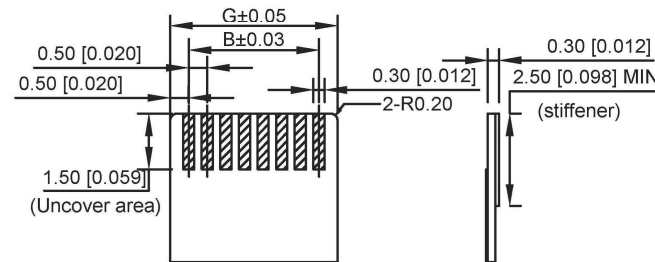


50	27.00	24.50	25.57	26.39	26.10	26.90	25.50
45	24.50	22.00	23.07	23.89	23.60	24.40	23.00
40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
23	13.50	11.00	12.07	12.89	12.60	13.40	12.00
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50
12	8.00	5.50	6.57	7.39	7.10	7.90	6.50
11	7.50	5.00	6.07	6.89	6.60	7.40	6.00
10	7.00	4.50	5.57	6.39	6.10	6.90	5.50
8	6.00	3.50	4.57	5.39	5.10	5.90	4.50
7	5.50	3.00	4.07	4.89	4.60	5.40	4.00
6	5.00	2.50	3.57	4.39	4.10	4.90	3.50
4	4.00	1.50	2.57	3.39	3.10	3.90	2.50
Number of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

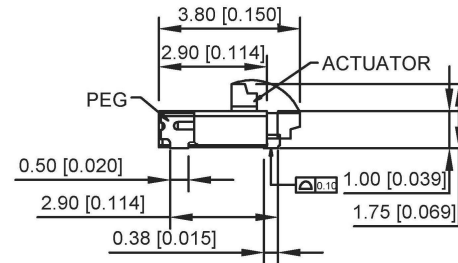

1.FPC NOT MATING CONDITION BANNED CLOSURE
2.PART NO. LEGEND.

① Series Name : X05A10=0.5 mm Pitch(H=1.0mm)
 ② Assembly style : L:Low Contact SMT Type U:Upper Contact SMT Type
 D:Double-Face Contact SMT Type H:Back-flip Double-Face Contact SMT Type
 ③ Number of terminals :XX=04-50PIN
 ④ Plating : G:Gold Flash Over Nickel T:Tin Over Nickel

3.1: CURRENT RATING:0.5A/PIN
3.2: VOLTAGE RATING:50V(AC/DC)
3.3: CONTACT RESISTANCE: INITIAL VALUE 30mOHM Max.
3.4:INSULATION RESISTANCE:500MOHM Min.
3.5:DIELERIC WITHSTANDING VOLTAGE:250V AC FOR 1MINUTE
3.6:DURABILT: 20 TIMES Min
3.7:OPERATING TEMPERATURE:-40℃ ~+85℃
OPERATING HUMIDITY RANGE:20% TO 85%

DSND		SCALE: N/A	MODEL TYPE: FPC CONNECTOR		
DWN		VIEW: 	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.: X05A10LXXX		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					