
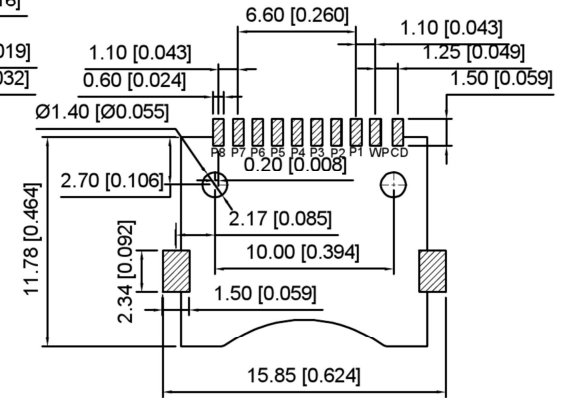

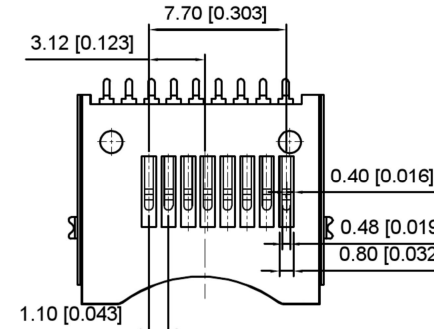
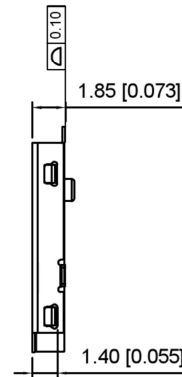


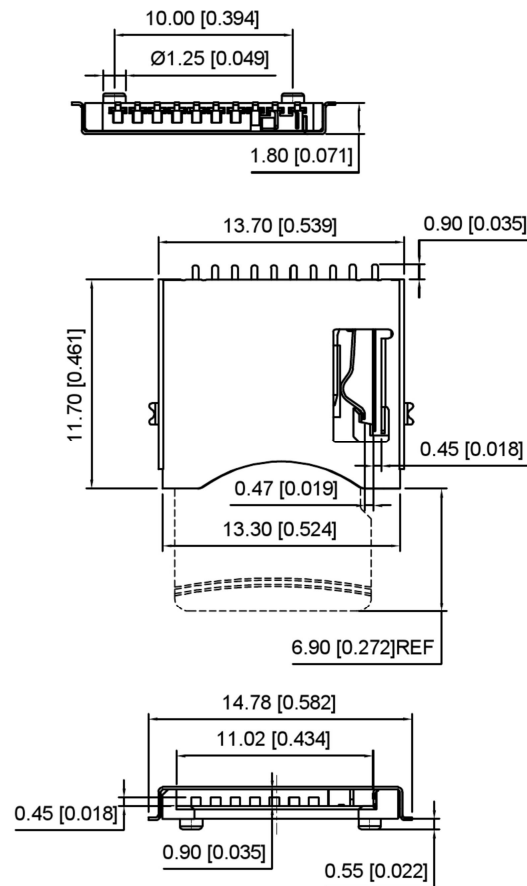

Recommended P.C.B Layout(Top Side)

NOTE 备注:

1.MATERIAL 材料

1.1 INSULATOR 绝缘材料:LCP UL 94V-D.BLACK

1.2 CONTACT 端子:H65;30U" MIN NICKEL UNDER PLATED OVERALL
80uMIN Tin PLATED ON SOLDER AREA
G/F PLATED ON CONTACT AREA

1.3 SHELL 外壳:H65,50u" Ni PLATED OVERALL

2.ELECTRICAL CHARACTERISTICS 电气特性:

2.1 CONTACT RESISTANCE 接触电阻:100mΩ MAX

2.2 CONTACT CURRENT RATING 额定电流:0.5A

2.3 DIELECTRIC WITHSTANDING VOLTAGE 耐电压:500 V R.M.S.

2.4 INSULATION RESISTANCE 1000 MΩ MIN.

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	BRASS	
②	Terminal	10	BRASS	
①	Housing	1	LCP UL 94V-0	BLACK

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
www.alpsr.com				
www.gdxjdz.com				
www.xbswitch.com				



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW: ①	TF CARD CONN
CHKD	UNIT: mm/in	PART NO.: XKTF-005
APPD	SIZE: A4	DWG NO.:
		WEIGHT
		SHEET
		REVISION
		1/1
		A0