
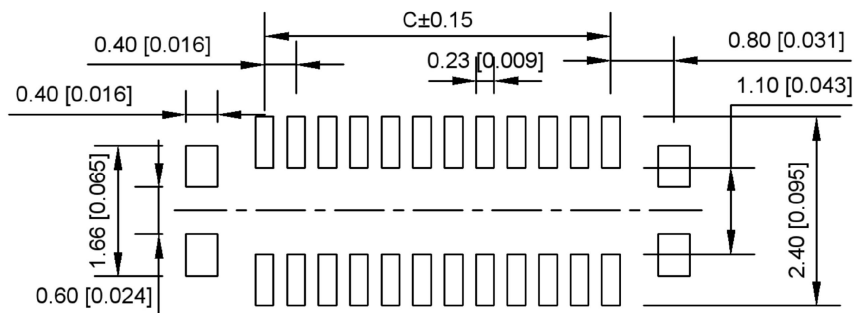

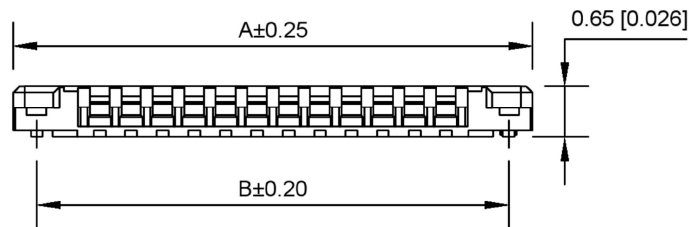


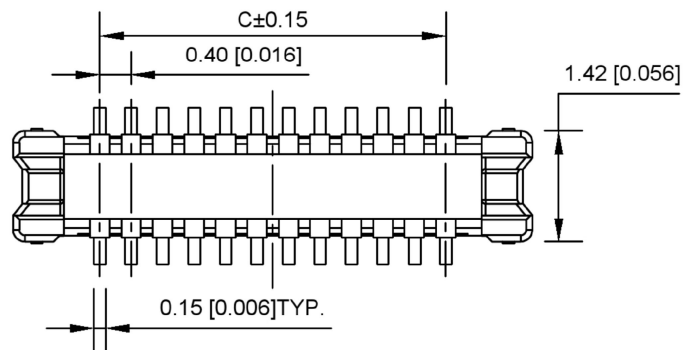

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

规格 SPECIFICATIONS:

- 1.电压/电流额定值 VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.耐电压 WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.绝缘电阻 INSULATION RESISTANCE: 50MΩ MIN;
- 4.接触电阻 CONTACT RESISTANCE: 100mΩ MAX;
- 5.工作温度范围 OPERATING TEMPERATURE RANGE: -35°C TO 85°C.

材料 MATERIAL:

- 1.绝缘材料 INSULATOR: LCP UL 94V-0 BLACK;
- 2.端子 TERMINAL: COPPER ALLOY;
- 3.金属配件 METAL FITTINGS: COPPER ALLOY.

镀层 PLATING:

- 1.端子 TERMINAL: GOLD PLATING, NICKEL 50u" MIN. OVER ALL;
- 2.金属配件 METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

X0400 W V S -XX -LP V01
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N o
- ② Weld in g Board Angle : W-Wafer
- ③ Weld in g Board Angle : V-180° R-90°
- ④ Welding Way:S-SMT
- ⑤ Row No.-Pin No.: XX-Single Row
- ⑥ Material: LP-LCP 94V-0
- ⑦ Plating Category: V01-Gold Flash

PIN NO.	A	B	C
10	3.8	3.2	1.6
12	4.2	3.6	2.0
16	5.0	4.4	2.8
20	5.8	5.2	3.6
24	6.6	6.0	4.4
30	7.8	7.2	5.6
34	8.6	8.0	6.4
40	9.8	9.2	7.6
50	11.8	11.2	9.6

X0400WVS-XX-LPV01	LCP 94V-0	COPPER ALLOY	GOLD PLATING	X0400FVS
PART NO	Material	Material(Terminal)	Finish(Terminal)	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.: X0400WVS-XX-LPV01
APPD		SIZE: A4	WEIGHT
			SHEET
			REVISION
			1/1
			A0