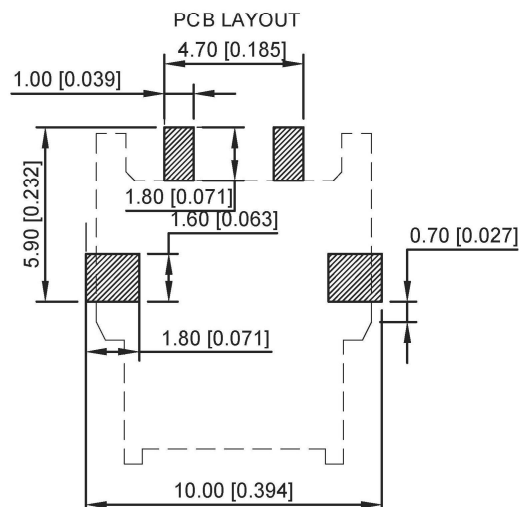
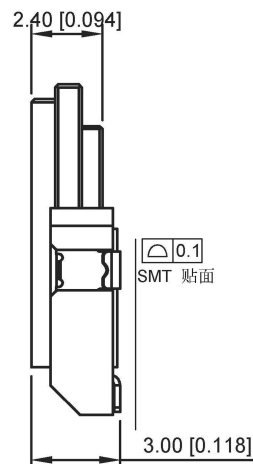

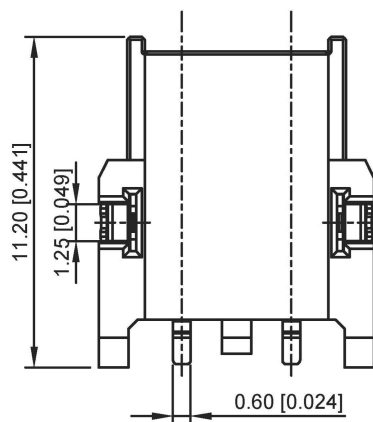
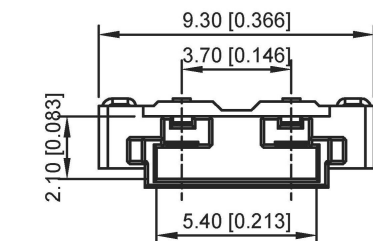


Specifications:
 Voltage rating:500V AC/DC
 Current rating:2A AC/DC
 Withstanding voltage:1500V AC/minute
 Temperature range: -40℃ ~85℃
 Insulation resistance:≥1000MΩ
 Contact resistance:≤40mΩ
 After environmental testing:≤80mΩ

X3700W M-02HF-LPSN
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-WAFER
- ③ Welding Board Angle:M-Male
- ④ Row No.-Pin No.:02-Single Row
- ⑤ Plug the Pin&Special No.:HF-Halogen Free
- ⑥ Material:LP-LCP 94V-0
- ⑦ Plating Category:SN-Bright Tin Plating

X3700WM-02HF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze	Matte Tin-Plated	Phosphor Bronze	Matte Tin-Plated	X3700WF
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)	Mates With Housing

							DSND		SCALE: N/A	MODEL TYPE: X3700WM-02HF-LPSN		
							DWN		VIEW: 	PART NO.: 3.70mm BTB Style Connectors		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			
						REVISIONS		UNSPECIFIED TOLERANCES		WEIGHT		
										SHEET		
										REVISION		
										1/1		
										A0		