

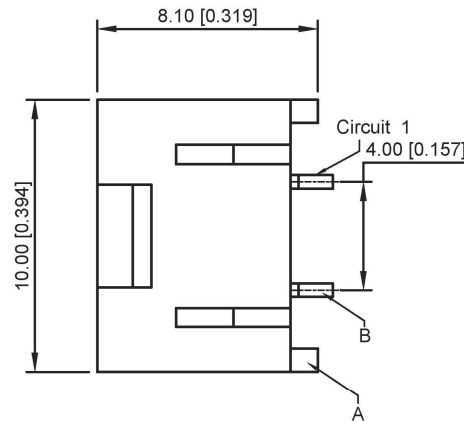
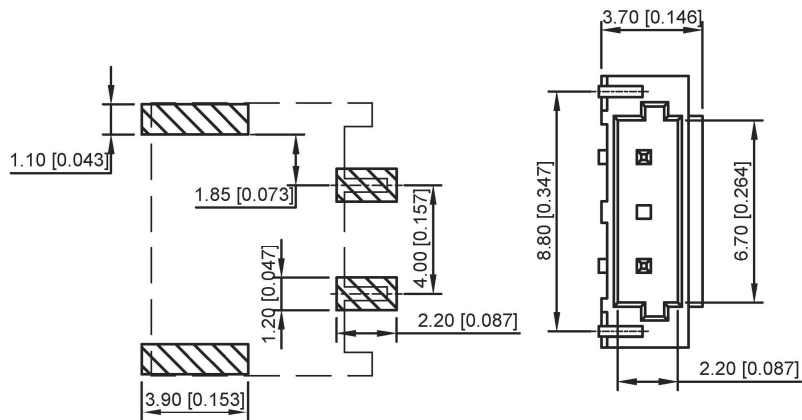
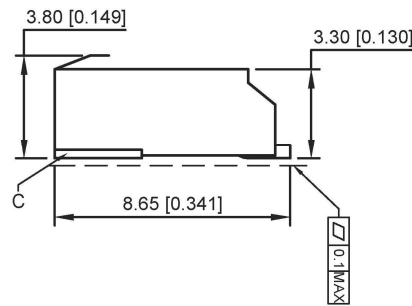




Specifications:
 Voltage rating: 600V AC/ DC
 Current rating: 1A AC/DC
 Withstanding voltage: 1800V AC/minute
 Temperature range: -25° ~ +105°
 Insulation resistance: $\geq 1000M\Omega$
 Contact resistance: $\leq 20m\Omega$
 After environmental testing: $\leq 40m\Omega$

X4001 W V-02 L-LP SN
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category: W-WAFER
- ③ Welding Board Angle: V-180°
- ④ Row No.-Pin No.: 02P
- ⑤ Plug the Pin & Special No.: L-With Lock
- ⑥ Material: LP-LCP 94V-0
- ⑦ Plating Category: SN-Bright Tin Plating

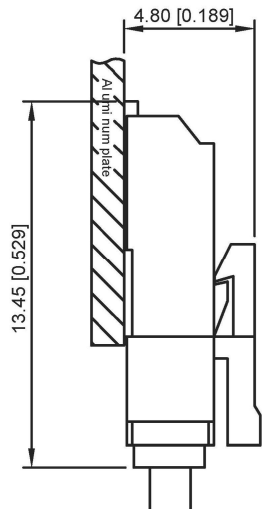

X4001WV-02L-LPSN	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)

							DSND		SCALE: N/A	MODEL TYPE: X4001WV-02L-LPSN				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: 4.00mm BTB Style Connectors				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
				DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						WEIGHT	SHEET	REVISION
													1/1	A0