
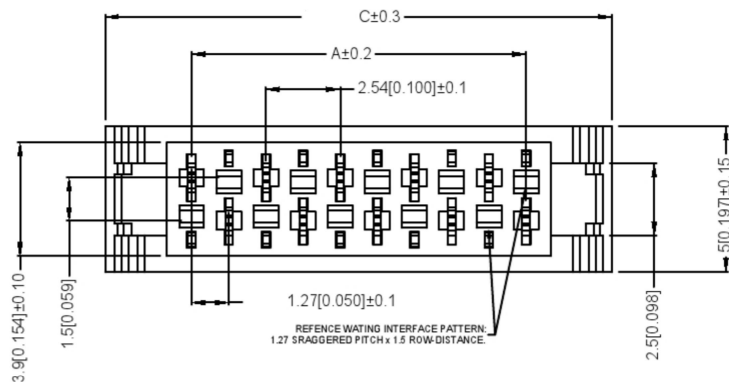
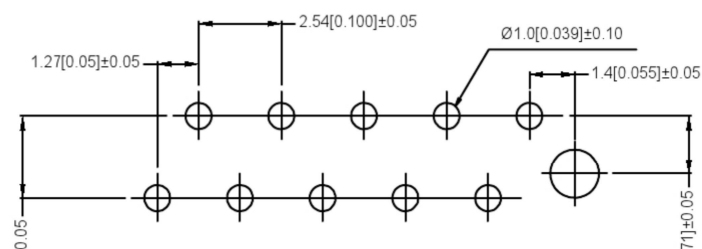
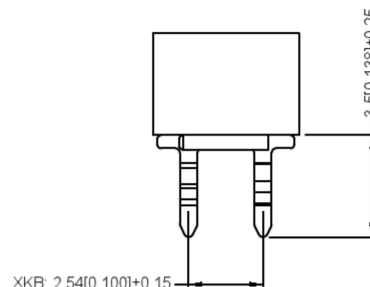


Specifications:
规格:
Voltage rating:500V AC/DC
额定电压: 500V AC/DC
Current rating: 1A AC/DC
额定电流: 1A AC/DC
Withstanding voltage:1000V AC/minute
耐压电压: 1000V AC/分钟
Temperature range:-40℃~+105℃
温度范围: -40℃~+105℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance: ≤20mΩ
接触电阻≤20mΩ
After environment testing: ≤30mΩ
环境试验后: ≤30mΩ

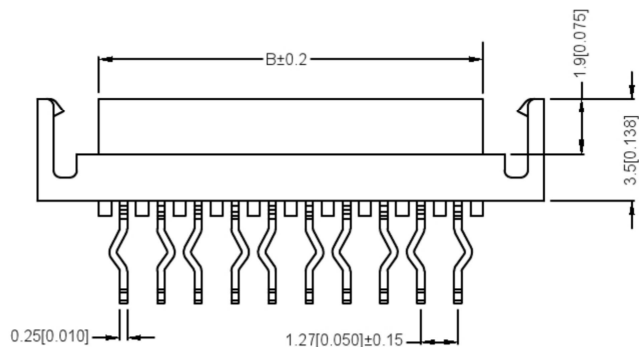

X9127 W V X-XX B - 9T SN XX

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-04P~26P
- ⑥ Plug the Pin & Special No.:
B-With boss and tail、With Ear、Concave
- ⑦ Material: 9T-Nylon 9T 94V-0
- ⑧ Plating Category: SN-Bright tin Plating
- ⑨ Color: RE-Red RD-purplish red

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
4	3.81	5.50	9.71	16	19.05	20.74	24.95
6	6.35	8.04	12.25	18	21.59	23.28	27.49
8	8.89	10.58	14.79	20	24.13	25.82	30.03
10	11.43	13.12	17.33	22	26.67	28.36	32.57
12	13.97	15.66	19.87	24	29.21	30.90	35.11
14	16.51	18.20	22.41	26	31.75	33.44	37.65

X9127WW-XXB-9TSNRD	Purplish red	PA9T UL 94V-0	Brass	Tin-Plated
X9127WW-XXB-9TSNRE	RED			
PART NO	Color	Material	Material(Pin)	Finish(Pin)

								DSND		SCALE: N/A	MODEL TYPE:			
								DWN		VIEW: 	PART NO.:			
								CHKD		UNIT: mm/in	1.27 mm Crimp Style Connectors			
								APPD		SIZE: A4	DWG NO.:			
												X9127WW-XXB-9TSNXX		
REVISIONS						UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0