
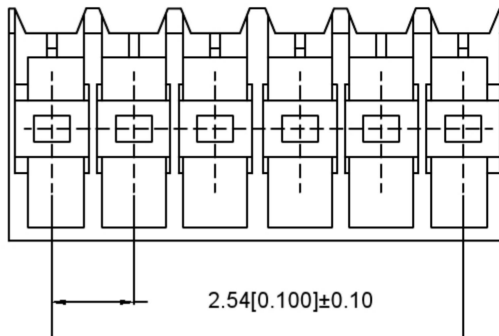
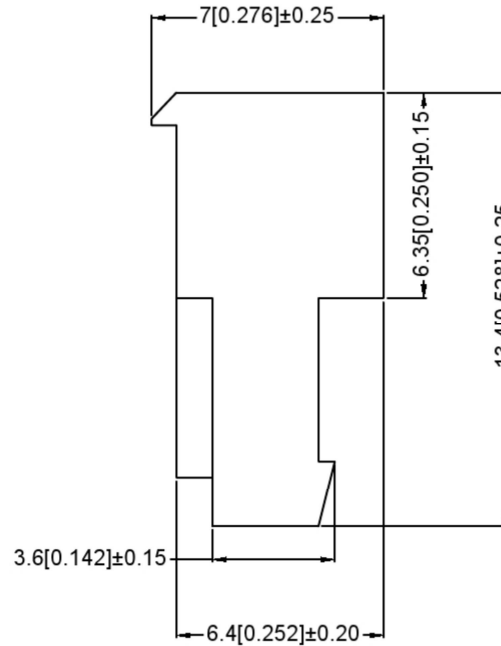


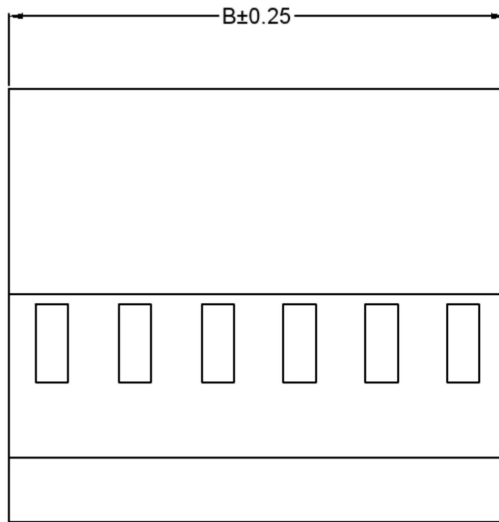

Specifications:

规格:

Voltage rating: 250V AC/DC

额定电压: 250V AC/DC

Current rating: 2A AC/DC

额定电流: 2A AC/DC

Withstanding voltage: 1500V AC/minute

耐压电压: 1500V AC/分钟

Temperature range: -25℃ ~ +85℃

温度范围: -25℃ ~ +85℃

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤20mΩ

接触电阻: ≤20mΩ

Linetype: AWG#22 AWG#24 AWG#26 AWG#28

X9254 H IR - XX - N0

① ② ③ ④ ⑤

① Series No.

② Category: H-HSG

③ Welding Board Angle: I-HSG+Hardware R-Right Angle 90°

④ Row No.-Pin No.: XX-02P~30P

⑤ Material: N0-PA66 94V-0

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.54	5.20	10	22.86	25.52
3	5.08	7.72	11	25.40	28.06
4	7.62	10.28	12	27.94	30.60
5	10.16	12.82	30	73.66	76.32
6	12.70	15.36			
7	15.24	17.90			
8	17.78	20.44			
9	20.32	2.98			

X9254HIR-XX-N0	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9254W
PART NO	Material	Material(Pin)	Finish(Terminal)	Wire Range

							DSND		SCALE: N/A	MODEL TYPE:			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
				L ≤ 4	±0.2					2.54mm IDC Style Connectors			
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:			
				16 < L ≤ 63	±0.4					X9254HIR-XX-N0			
				L > 63	±0.5		APPD		SIZE: A4				
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0