

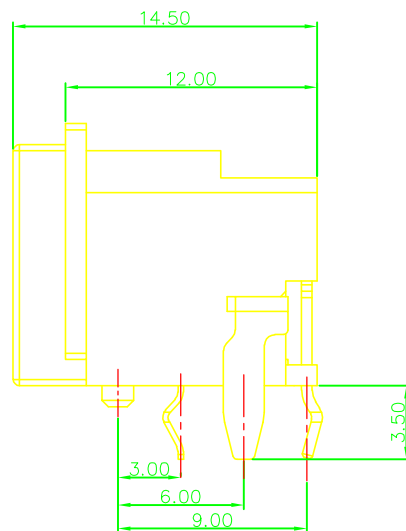
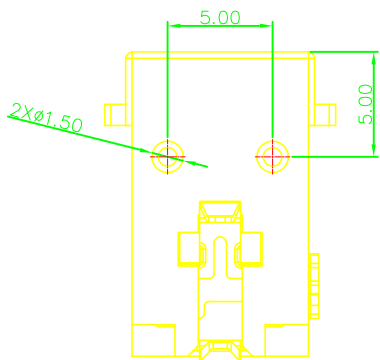
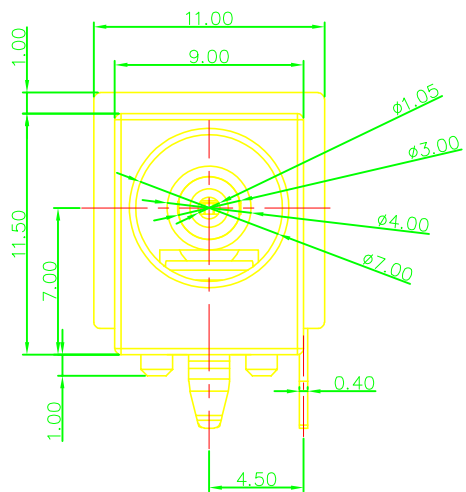



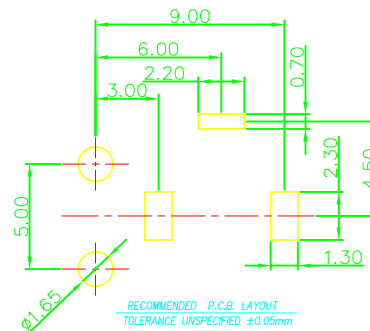


CIRCUIT DIAGRAM



NOTE:

1. ELECTRICAL CHARACTERISTICS
1-1. VOLTAGE RATING: 30V DC
1-2. CURRENT RATING: 2.0A DC
1-3. CONTACT RESISTANCE: 50 milliohms MAX.
1-4. INSULATION RESISTANCE: 100 Megohms MIN.
1-5. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
2. OPERATING TEMPERATURE: -40°C~85°C
3. RoHS 2002/95/EC COMPLIANT.

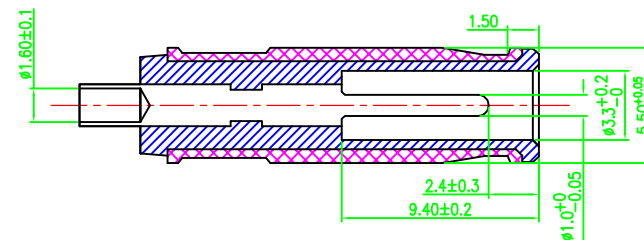

MATE PLUG
P/N.: DP550100-0085-60000H

D	DC JACK 接地端子	1	C2680 H	Ag 50u" plated all over Nickel under plated .
C	DC JACK 端子1	1	C2680 H	Ag 20u" plated all over Nickel under plated .
B	弹片端子	1	C5210 H	Ag 50u" plated all over Nickel under plated .
A	HOUSING	1	PBT GF15%	BLACK BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR


UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:	DC POWER JACK
DIM	TOL	DIM	TOL	PART NO.	XB-DC550100-1169-20000H
X.	±0.50	X.	±2°	SHEET: 1/1	REV.: A1
X.X	±0.30	X.X	±1°	DRAWING NO	
X.XX	±0.20	X.XX	—		
X.XXX	±0.10	X.XXX	—		
3RD ANGLE PROJECTION	UNIT: mm	APPROVED	Andy		
			2022.5.11		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

PACKING SKETCH:




1.PRODUCT

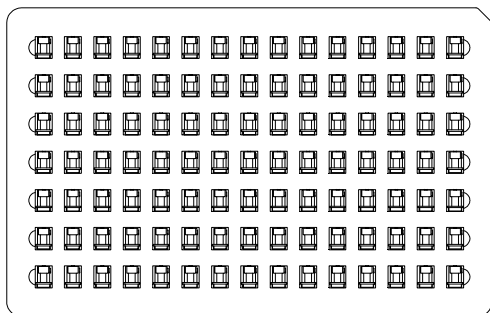



2. TRAY:
(330mm*210mm*20.5mm)



PE膜




3. PACK:
(19 TRAY/STACK)

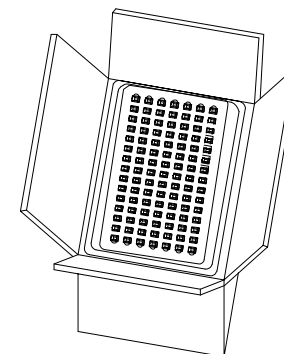

4. CARTON:
(350mm*223mm*345mm)

QTY/TRAY	TRAY/CARTON	QTY/CARTON
105	19	1995
Net weight/Box:	3.20Kg	
Gross weight/Box:	5.05Kg	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:		DESIGN:	Tony
DIM	TOL	DIM	TOL		2022.5.11
X.	±0.50	X.	±2°	CHECK:	
X.X	±0.30	X.X	±1°		
X.XX	±0.20	X.XX	—		
X.XXX	±0.10	X.XXX	—		
		UNIT: mm		APPROVED	Andy
					2022.5.11
				PART NAME:	
				DC POWER JACK—包装图	
				PART NO.	
				XB-DC550100-1169-20000H	
				SHEET: 1/1 REV.: A1	
				DRAWING NO	