

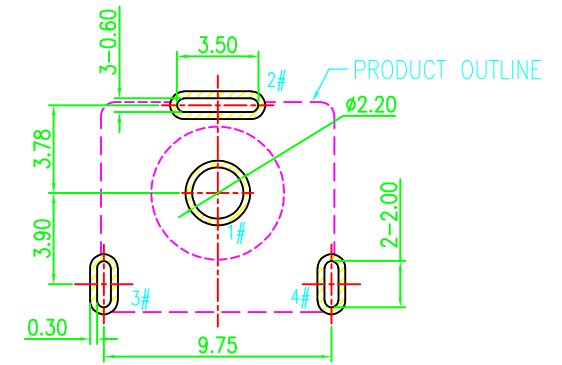
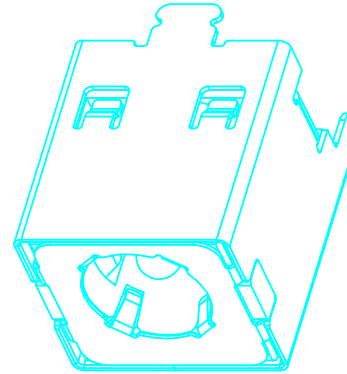
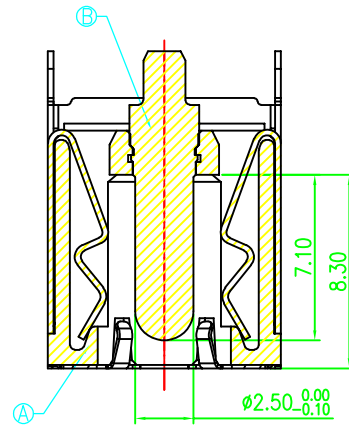
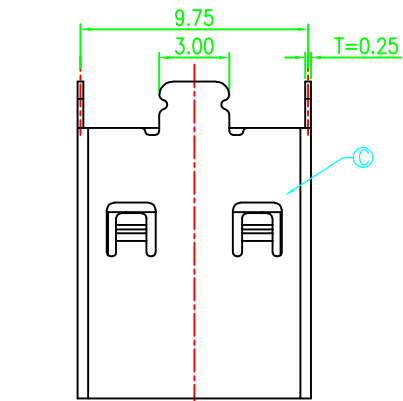
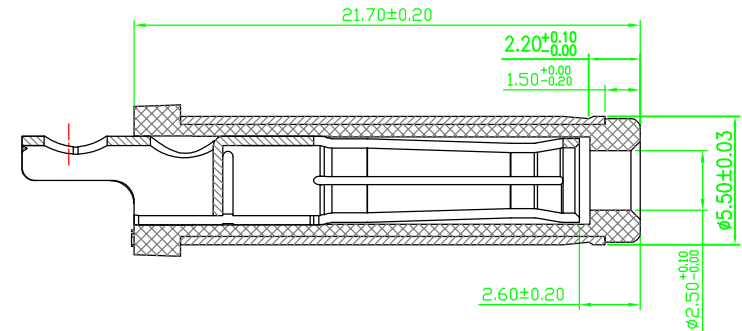


H=11.6mm

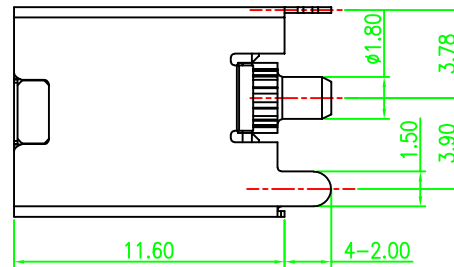


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05

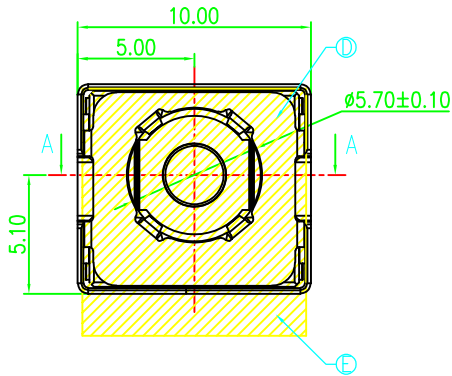

MATING PLUG
DP550250-0188-60000H

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m Ω MAX.(INITIAL)
50m Ω MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES




E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2022.4.15	Φ5.5 立式(H=11.6)	
X.	±0.50	X.	±2°		DC POWER JACK		
X.X	±0.30	X.X	±1°		PART NO.		
X.XX	±0.20	X.XX	——		XB-DC550250-1074-20000H		
X.XXX	±0.10	X.XXX	——	APPROVED	Andy	SHEET: 1/1 REV.: A1	
					2022.4.15	DRAWING NO	
3RD ANGLE PROJECTION							
UNIT: mm							

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------




UNIT:
mm


拉出方向

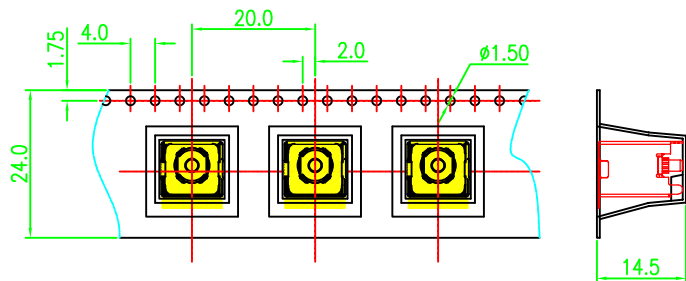

拉出方向

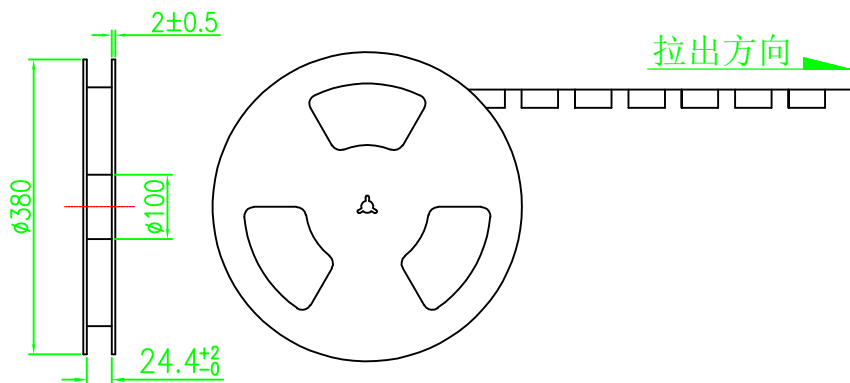

拉出方向



备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=385, W=385, H=300$
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: $0.1\text{N} \sim 0.7\text{N}$ ($10 \sim 70\text{gf}$);
拔离角度: $165^\circ \sim 180^\circ$;
拔离速度: 300mm/分钟 .

包装盘标签

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	

3RD ANGLE PROJECTION

UNIT:
mm

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:

Tony

2022.4.15

CHECK:

APPROVED

Andy-liu

2022.4.15

PART NAME:

DC POWER JACK
包装图

PART NO.

XB-DC550250-1074-20000H

SHEET: 1/1

REV.: A1

DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------