



1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: **12** VAC RMS;
 - 3.2. CURRENT RATING: **0.5** AMP;
 - 3.3. CONTACT RESISTANCE: **50mQ** Max.(Initial),
100mQ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: **1000** MΩ Min., 500VDC.(Initial),
100 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: **500** VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: **3.0Kgf** MAX.;
 - 4.2. UNMATING FORCE: **0.3Kgf** MIN.;
 - 4.3. OPERATING LIFE: **5000** CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.

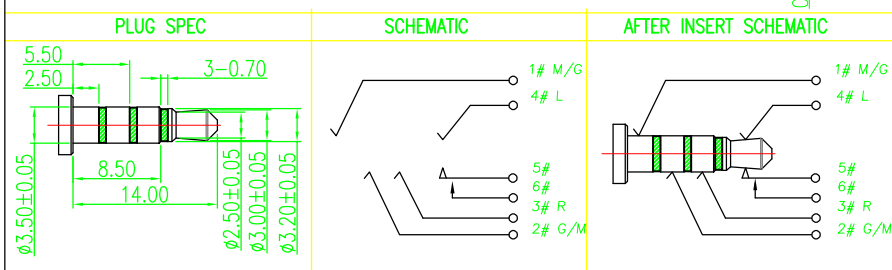






PCB HOLES(TOP VIEW) t=1.0mm
NOTE:GENERAL TOLERANCE:±0.05mm

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ 3.5 PHONE JACK
DIM	TOL	DIM	TOL	CHECK:	2021.2.2	
X.	±0.50	X.	±2°			
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	——	APPROVED	Andy	PART NO. XB-PJ03506-0742-00000H
X.XXX	±0.10	X.XXX	——			SHEET: 1/2
 3RD ANGLE PROJECTION				UNIT: mm	2021.2.2	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

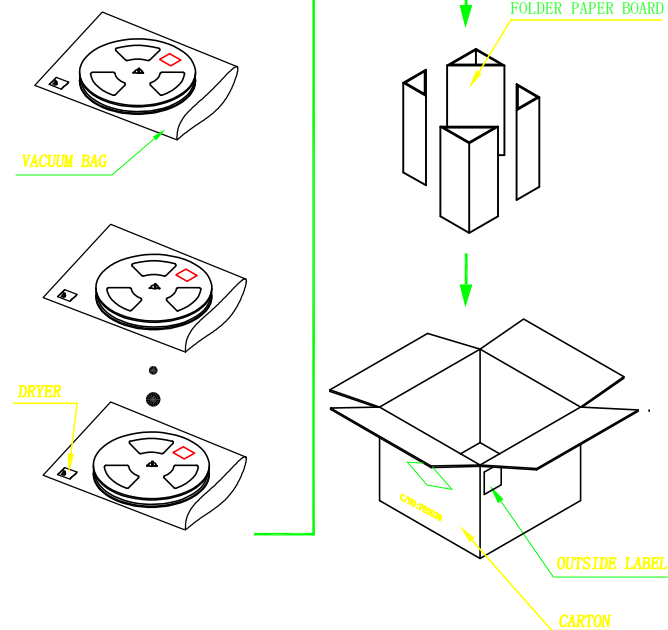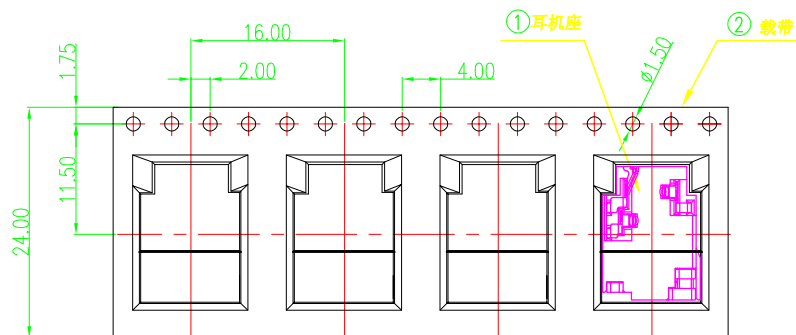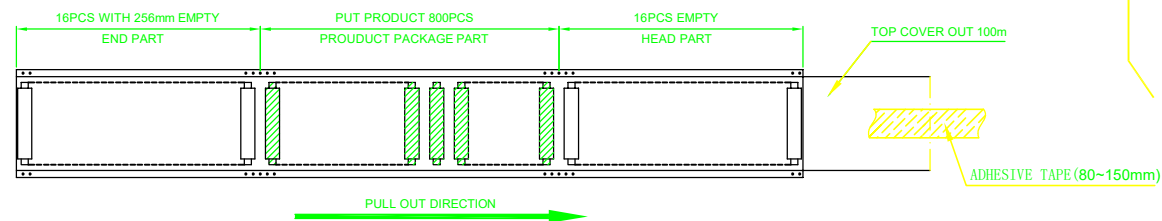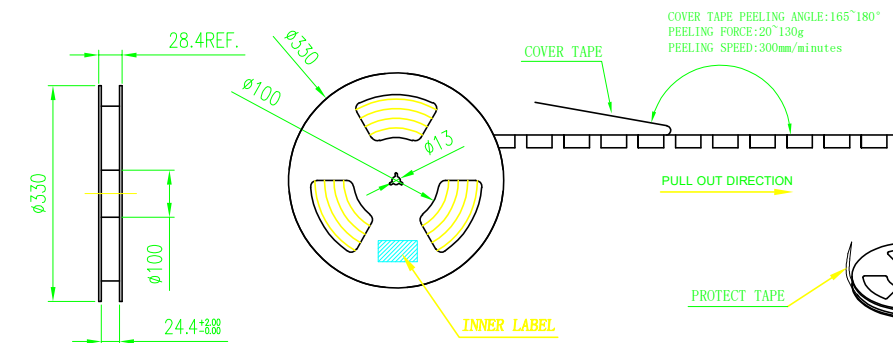

1 CARTON = 10 REEL = 8000 PRODUCT

NOTES:

1. Material requirements:


- 1.1 The carton material requirements for the K=A, Dimension is 350*340*310mm;
- 1.2 Reel materials for PET; size reel for 330*28.4.

2. Packaging requirements:

- 2.1 The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
- 2.2 Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
- 2.3 Winding a protect tape around the reel, then stick it by adhesive tape;
- 2.4 label should paste in the designated area of the reel;
- 2.5 Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
- 2.6 The tired folded 10 disks in the carton total 8000pcs;
- 2.7 Packed finished packing sealing, and in the outer carton label

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ 3. 5 PHONE JACK		
DIM	TOL	DIM	TOL	CHECK:	2021.2.2	PART NO. XB-PJ03506-0742-00000H		
X.	±0.50	X.	±2°		APPROVED	Andy 2021.2.2	SHEET: 2/2	REV.: A1
X.X	±0.30	X.X	±1°				DRAWING NO	
X.XX	±0.20	X.XX	—					
X.XXX	±0.10	X.XXX	—					
				UNIT: mm				
3RD ANGLE PROJECTION								

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------