


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	LH	/	MOON


NOTES:

SPECIFICATION:




1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

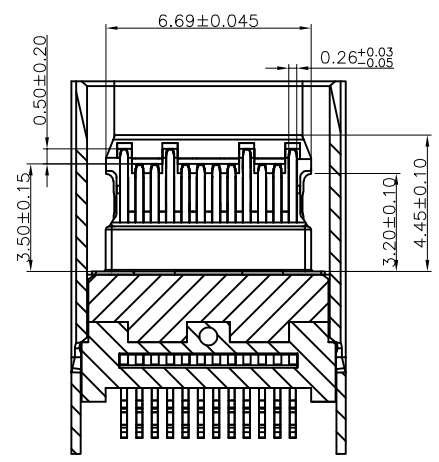

SECTION B-B

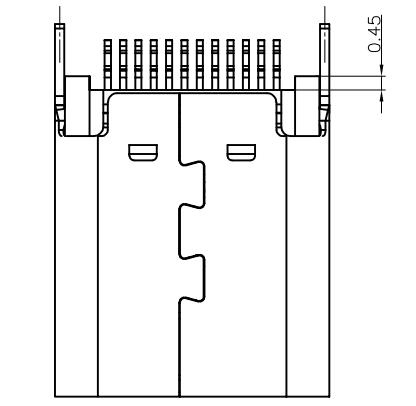

SECTION A-A

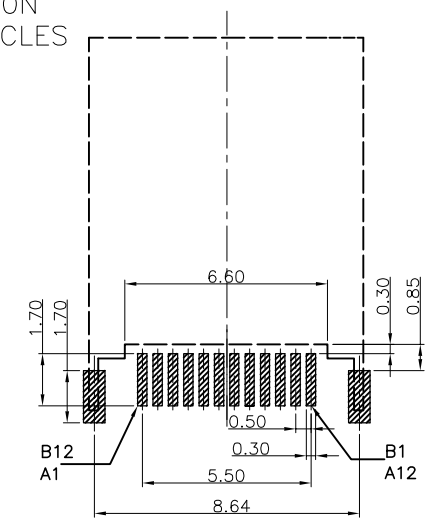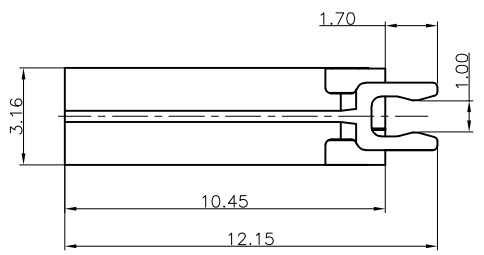

TOLERANCE UNSPECIFIED ±0.05mm

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1SET
3	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MILLIMETERS	INCH	UNITS
X° ± 2°	X° ± 2°	MM
.X ± 0.38	.XX ± 0.015	MAT'L
.XX ± 0.25	.XXX ± 0.010	SEE NOTES
.XXX ± 0.15	.XXXX ± 0.006	FINISH
		SEE NOTES
		QTY
		SEE NOTES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:
XB-104015353


APPD:

CHKD:

DR:

TITLE:
TYPE C 24P夹板式1.0长体10.5

DWG NO.:
C-104015353-00





SCALE
1:1

SHEET
1/2


REV.
A0

RoHS

50PCS PRODUCTS PER TUBE

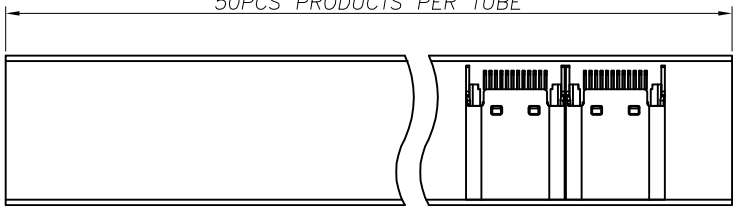



TUBE

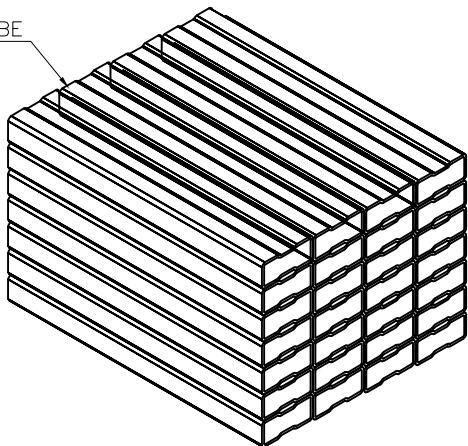


标签

CARTON

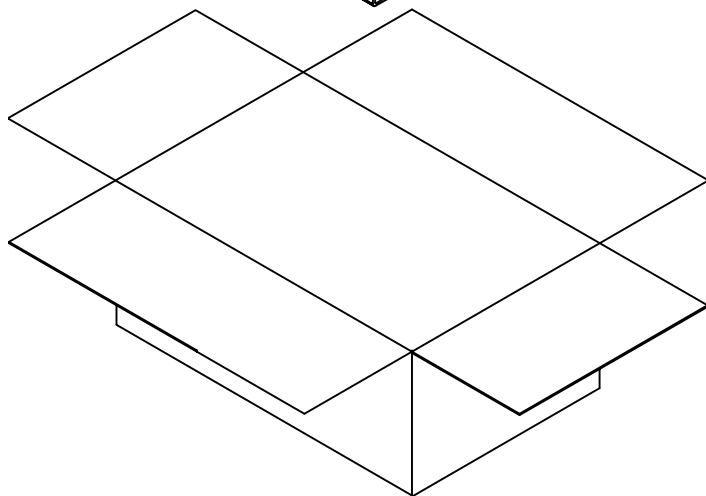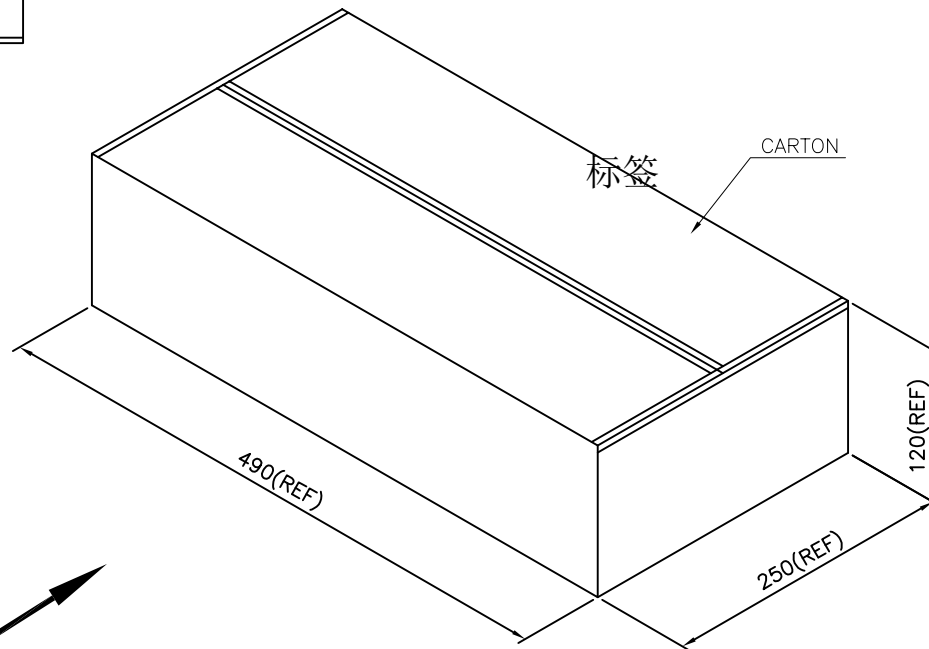

	TUBE	CARTON
CONNECTOR (PCS)	50	12000

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:	TITLE:
.X ± 0.38	.XX ± 0.015	SEE NOTES		XB-104015353	TYPE C 24P夹板式1.0长体10.5
.XX ± 0.25	.XXX ± 0.010	FINISH		APPD:	DWG NO.:
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES		CHKD:	C-104015353-00
		QTY		DR:	
		SEE NOTES			



SCALE	SHEET	REV.
1:1	1/2	A0