


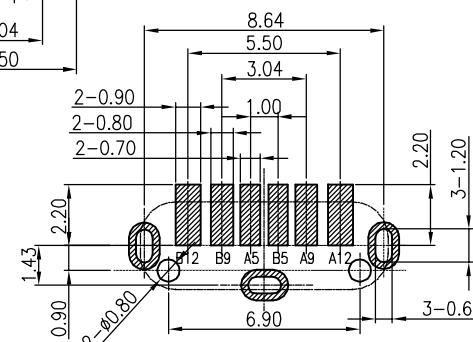
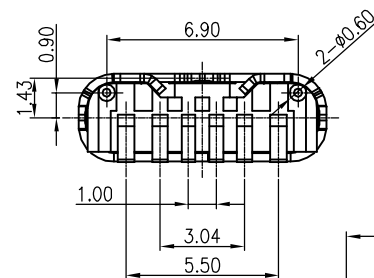




HSF

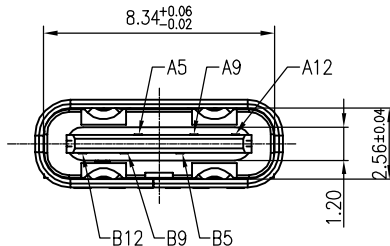


LOGO



PCB HOLES(TOP VIEW) t=0.8mm
NOTE: GENERAL TOLERANCE: ±0.05mm

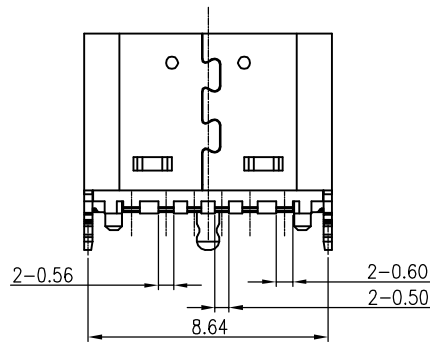

Schematic diagram of suction cover

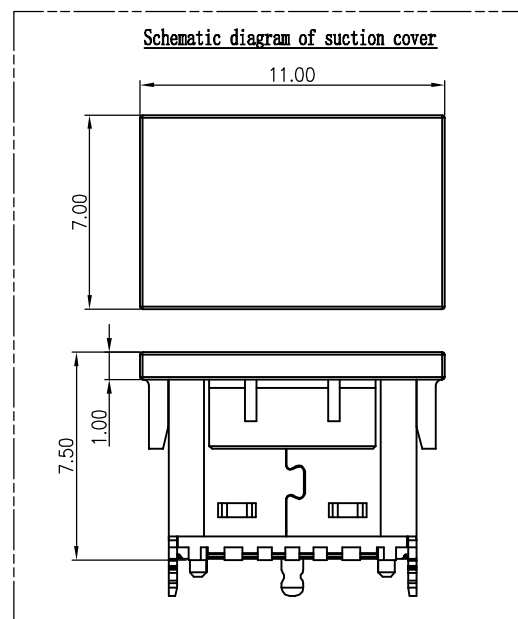

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	Bull.pan		2020\03\05
A1		Update drawing.	Bull.pan		2022\03\28

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

PRODUCT NO.

UC09 - 06 C B ** - 02*

① ② ③ ④ ⑤ ⑥

① SERIES:

UC09:USB TYPE C REC 6PIN

② POSITION:

06: 6PIN

③ MATERIAL:

C: PA9T

④ COLOR CODE:

B: BLACK

⑤ PLATING CODE:

G1: Au 1u"

⑥ SERIES NO.:

02:180° SMT type, With logo

02N:180° SMT type, No logo

4	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1 PC
3	SHELL	STAINLESS STEEL t=0.30	Ni:50u" Plated	1 PC
2	CONTACT	COPPER ALLOY t=0.20	Au:1u"/Ni:50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1 PC
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CUSTOMER DRAWING




XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE X. ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING Bull. pan	TITLE: USB TYPE C REC 6PIN (H=6.5)180° SMT TYPE
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	APPROVED	P/N: XB-UC09-06CBG1-02*
	DATE 2022. 03. 28	DRAWING NO. XB-C-UC09-02
	UNIT mm SCALE 1:1	SIZE A4 SHEET 1of2 REV A1


HSF

□ Packing Notes:

1. Reel : 500pcs/ Reel.
2. Carton : 5500pcs/ 11 Reel/ Carton.

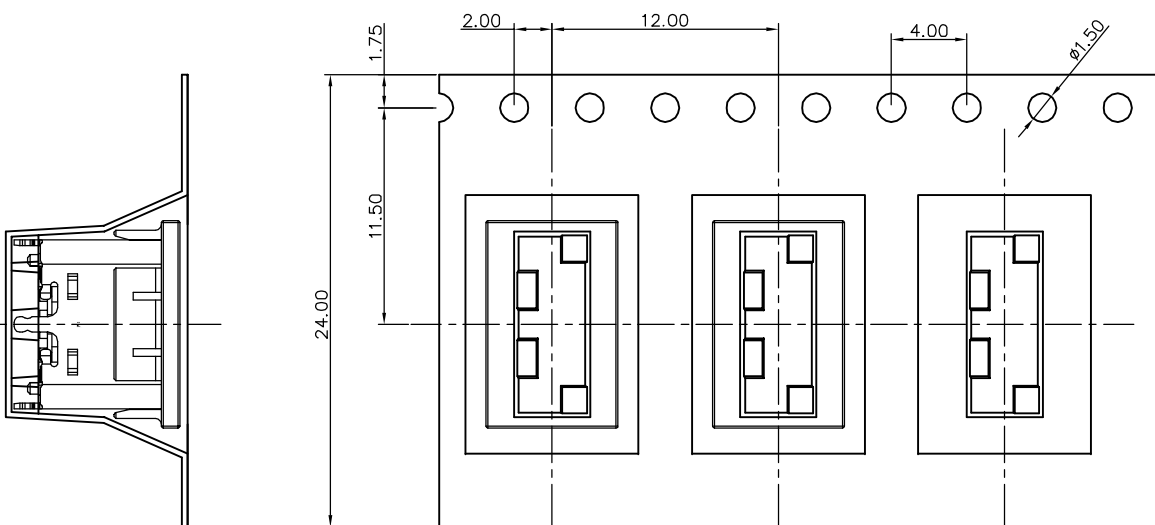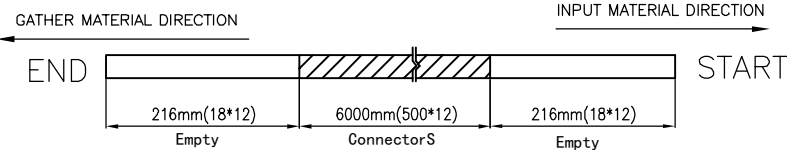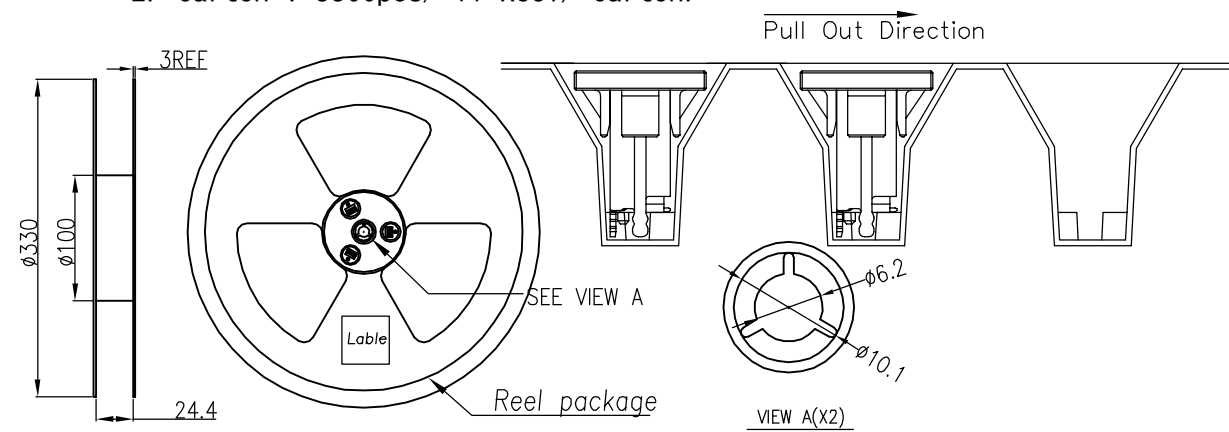


- 1) Seal the carton with tape;
- 2) Attach the label to the side of the carton.

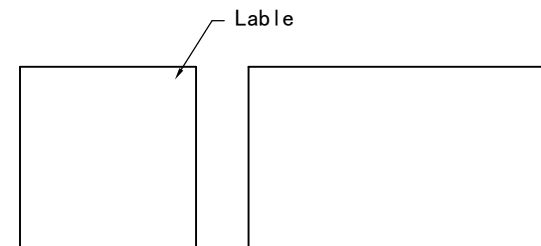

REMARK:

- 1).If there are empty zero boxes, they must be filled with buffer materials.
- 2). Handle with care during handling.
- 3). During transportation, do not stack too much and do not have heavy pressure.
- 4). The upper tape must be flat when sticking the lower tape, and there shall be no bubbles at the sticking place.

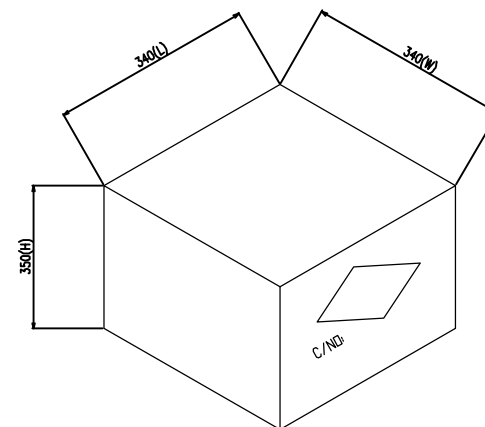

PACKING DRAWING		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
GENERAL TOLERANCE	DRAWING	Bull.pan	TITLE: USB TYPE C REC 6PIN (H=6.5) 180° SMT TYPE
X. ±0.20	APPROVED		P/N: XB-UC09-06CBG1-02*
.XX ±0.15	DATE	2022.03.28	DRAWING NO. XB-C-UC09-02
.XXX ±0.10	UNIT	mm	SCALE
ANGEL TOLERANCE	1:1	SIZE	A4
X. ±3°	SHEET	2of2	REV
.XX ±2°	A1		
.XXX ±1°			