
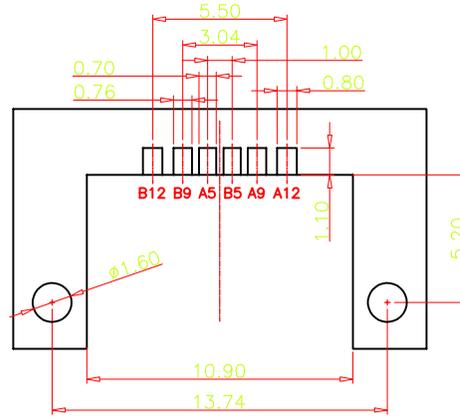
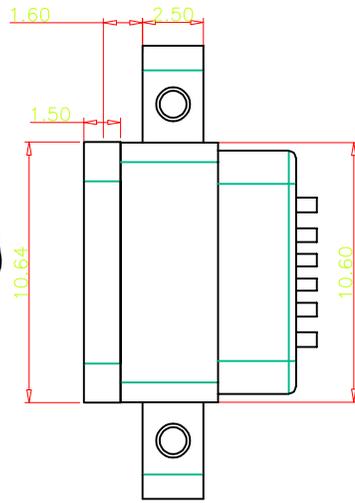


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			2018.11.05




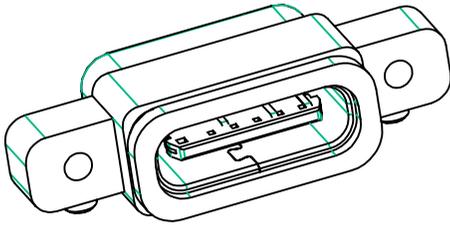


NOTES:


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE:  $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED  $\pm 0.05\text{mm}$

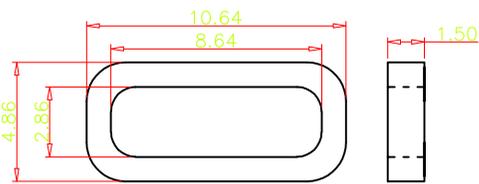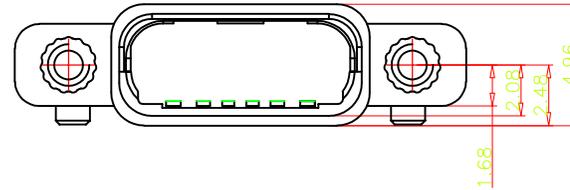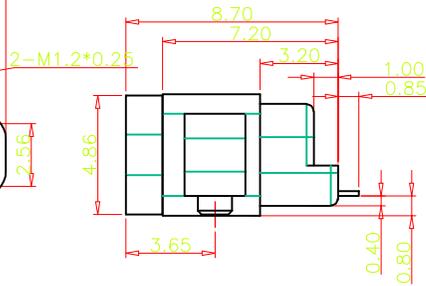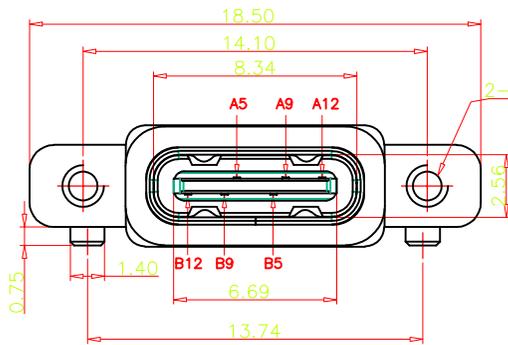

建议的胶圈尺寸

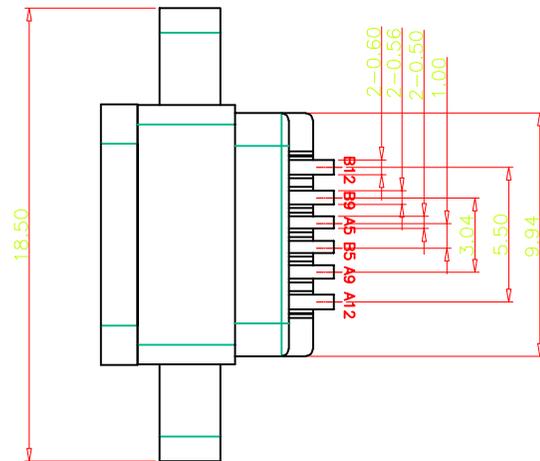


5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TOLERANCE		NAME (INTENDED USE) CUSTOMER DRAWING		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONIC CO., LTD.
X.X	$\pm 0.30$	X.*	$\pm 2^{\circ}$	
.XX	$\pm 0.20$	.X*	$\pm 1^{\circ}$	PART NO.
.XXX	$\pm 0.10$	.XX*	$\pm 0.5^{\circ}$	TITLE: TYPE-C 6PIN带双耳螺丝孔防水母座
UNITS	mm	APPD:	DMX	DRAWG NO. XB-AA0-078
MATERIAL		CHED:	TANG	SCALE
FINISH		DRAW:	SHI	SHEET
				REV. A


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行			2018.11.05

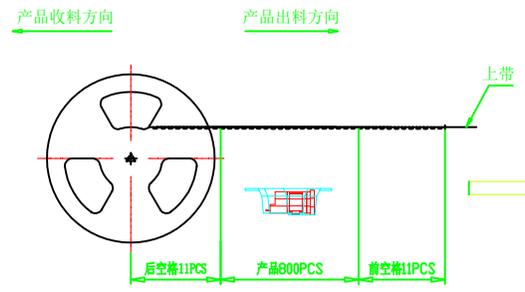

1 产品入载带示意图




2 卷盘贴标签示意图




3 8盘产品叠层示意图


W	32.00±0.30	P	16.00±0.10
S	28.40±0.10	P0	4.00±0.10
E	1.75±0.10	P2	2.00±0.10
F	14.20±0.10	D0	φ1.50 ± 0.10
T	0.35±0.05	K0	5.16±0.10
A0	9.00±0.10	B0	18.50±0.10

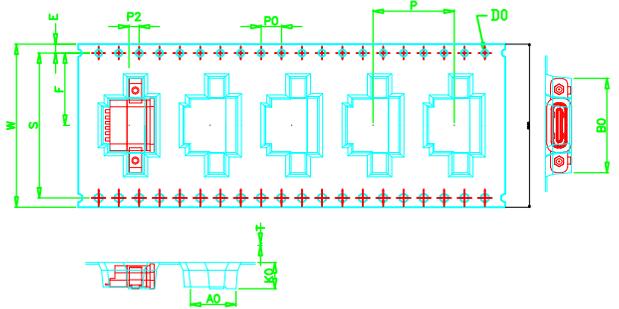

NOTE:  
 1. QUANTITY/REEL: 800 PCS  
 数量/卷: 800 PCS  
 QUANTITY/INNER CARTON: 800 X 8 = 6400 PCS  
 数量/箱: 800 X 8 = 6400 PCS  
 2. FREE 11 CAVE IN THE FRONT CARRIER ADN FREE  
 11 CAVE IN THE END CARRIER.  
 包装带内圈空11格,外圈空11格.



5 外箱封箱示意图

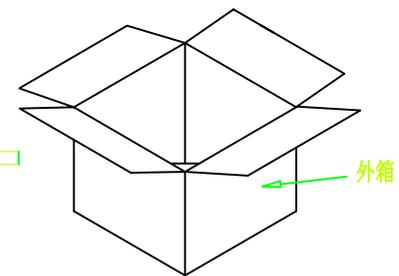

4 产品入外箱示意图

1	??		C TYPE 插座成品	6400
2	CARRIER TAPE	PET	W=32.0mm T=0.35mm	
3	COVER TAPE	PET	W=25.5mm T=0.05mm	
4	???		L102mm*W59mm	8
5	卷盘	PS	φ330MM*W36.5MM	8
6	天地板	K3K	L320mm*W320mm	2
7	???		L102mm*W102mm	1
8	三角柱	K=K	L300mm*W210mm	4
9	??	A=A	L330mm*W330mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

TOLERANCE		NAME (INTENDED USE) CUSTOMER DRAWING		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONIC CO., LTD.	
X.X	±0.30	X.*	± 2°	PART NO.	
.XX	±0.20	.X*	± 1°	TITLE: TYPE C 沉板6PIN 带双耳螺丝孔防水型一包装规范	
.XXX	±0.10	.XX*	±0.5°	DRAWG NO.	
UNITS	mm	APPD: DMX		SCALE	
MATERIAL		CHED: TANG		SHEET	
FINISH		DRAW: SHI		REV.	
				1:1	1/1
				A	