

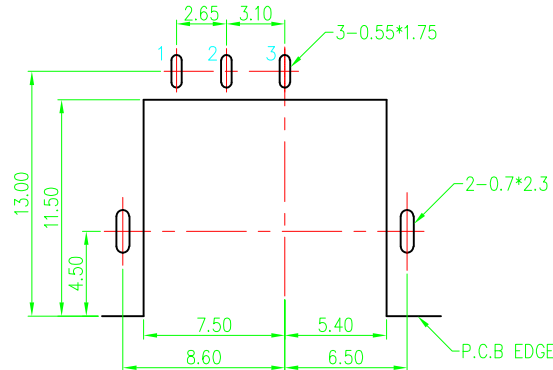
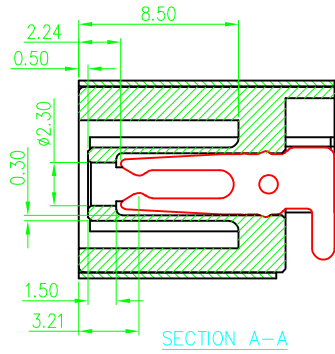
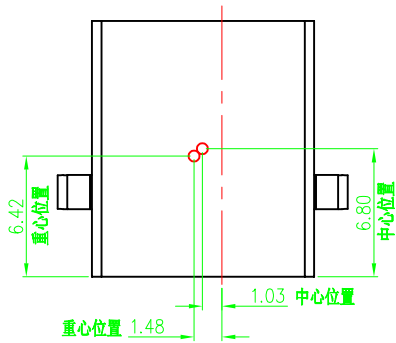
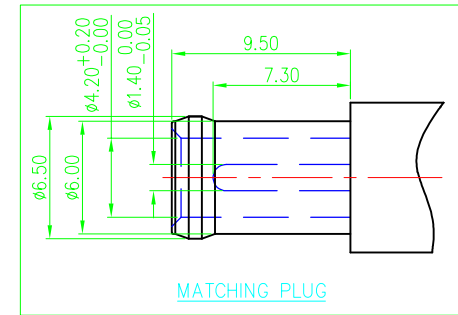
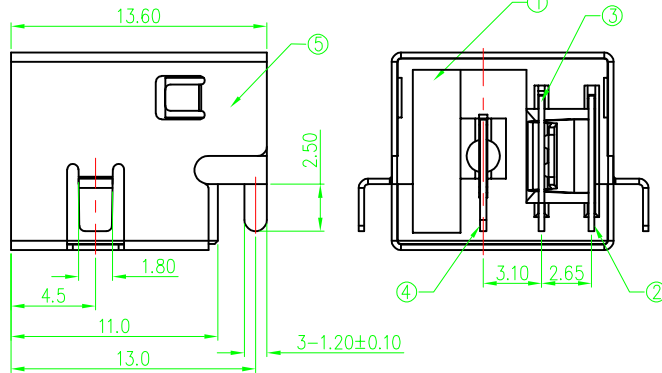




RECOMMENDED P.C.B LAYOUT
TOP VIEW TOLERANCE: $\pm 0.03\text{mm}$
P.C.B THICKNESS: 1.60mm

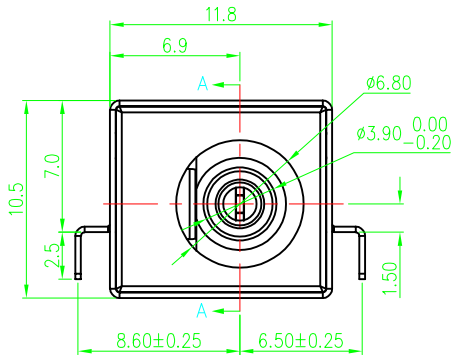

NOTES:

1.ELECTCAL CHARACTERISTICS:

1-1.CONTACT CURRENT RATING: 3A.

1-2.CONTACT VOLTAGE RATING: 20V DC.

1-3.CONTACT RESISTANCE: 30 MILLIOHMS MAX.

1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.

1-5.INSULATION RESISTANCE: 100 MEGOHMS MIN.AT DC 500V.

2.MECHANICAL CHARACTERISTICS:

2-1.DURABILITY: 5000 CYCLES.

2-2.INSERTION AND EXTRACTION FORCE: 0.3Kgf~3Kgf.

3.ENVIRENMENT CHARACTERISTICS:

3-1.OPERATING TEMPERATURE: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$

3-2.HUMIDTY: 45~85% RH.

⑤ SHIELDING		1	SPCC t=0.30mm	Ni-PLATED	
④ TERMINAL	3	1	H62 t=0.35mm	Ag-PLATED	
③ BREAK TERMINAL	2	1	H62 t=0.30mm	Ag-PLATED	
② SPRING TERMINAL	1	1	Qsn6.5—0.1 t=0.30mm	Ag-PLATED	
① HOUSING		1	PA9T UL94 V-0	BLACK	
No.	PART NAME	TER'No.	Q'ty	MATERIAL	PLATING & COLOR



UNLESS OTHERWISE
SPECIFIED TOLERANCES




东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM	TOL	DIM	TOL	Φ6.5 X Φ1.4
X.	±0.50	X.	±2°	DC POWER JACK
X.X	±0.30	X.X	±1°	PART NO.
X.XX	±0.20	X.XX	—	DC650140-0917-20000H
X.XXX	±0.10	X.XXX	—	SHEET: 1/1 REV.: A1
3RD ANGLE PROJECTION	UNIT: mm	APPROVED	Andy	DRAWING NO
			2021.9.16	



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

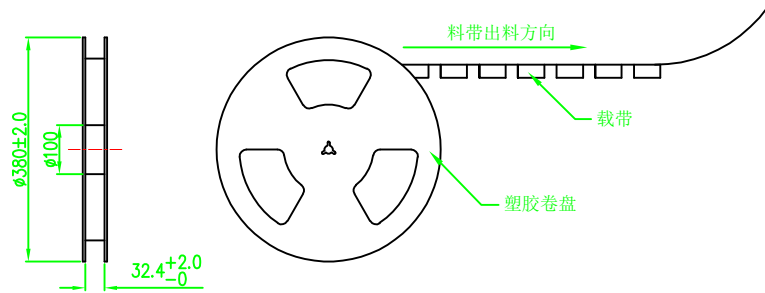


350PCS/盘




1750PCS/3盘/内箱

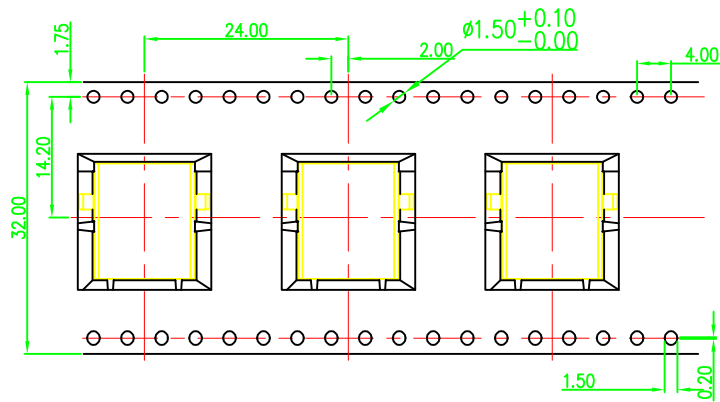

产品放置卷带示意图

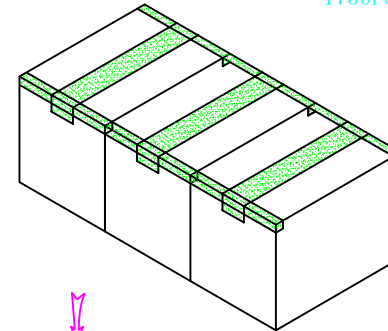

3内箱

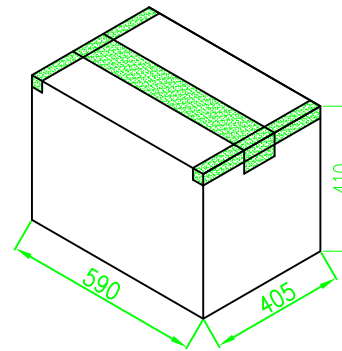

5250PCS/15盘/3内箱/外箱

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—
3RD ANGLE PROJECTION		UNIT: mm	

DESIGN:	Tony
CHECK:	
APPROVED	Andy
	2021.9.16

PART NAME:	
Φ6.5 X Φ1.4	
DC POWER JACK-包装图	
PART NO.	
DC650140-0917-20000H	
SHEET: 1/1	REV.: A1
DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------