



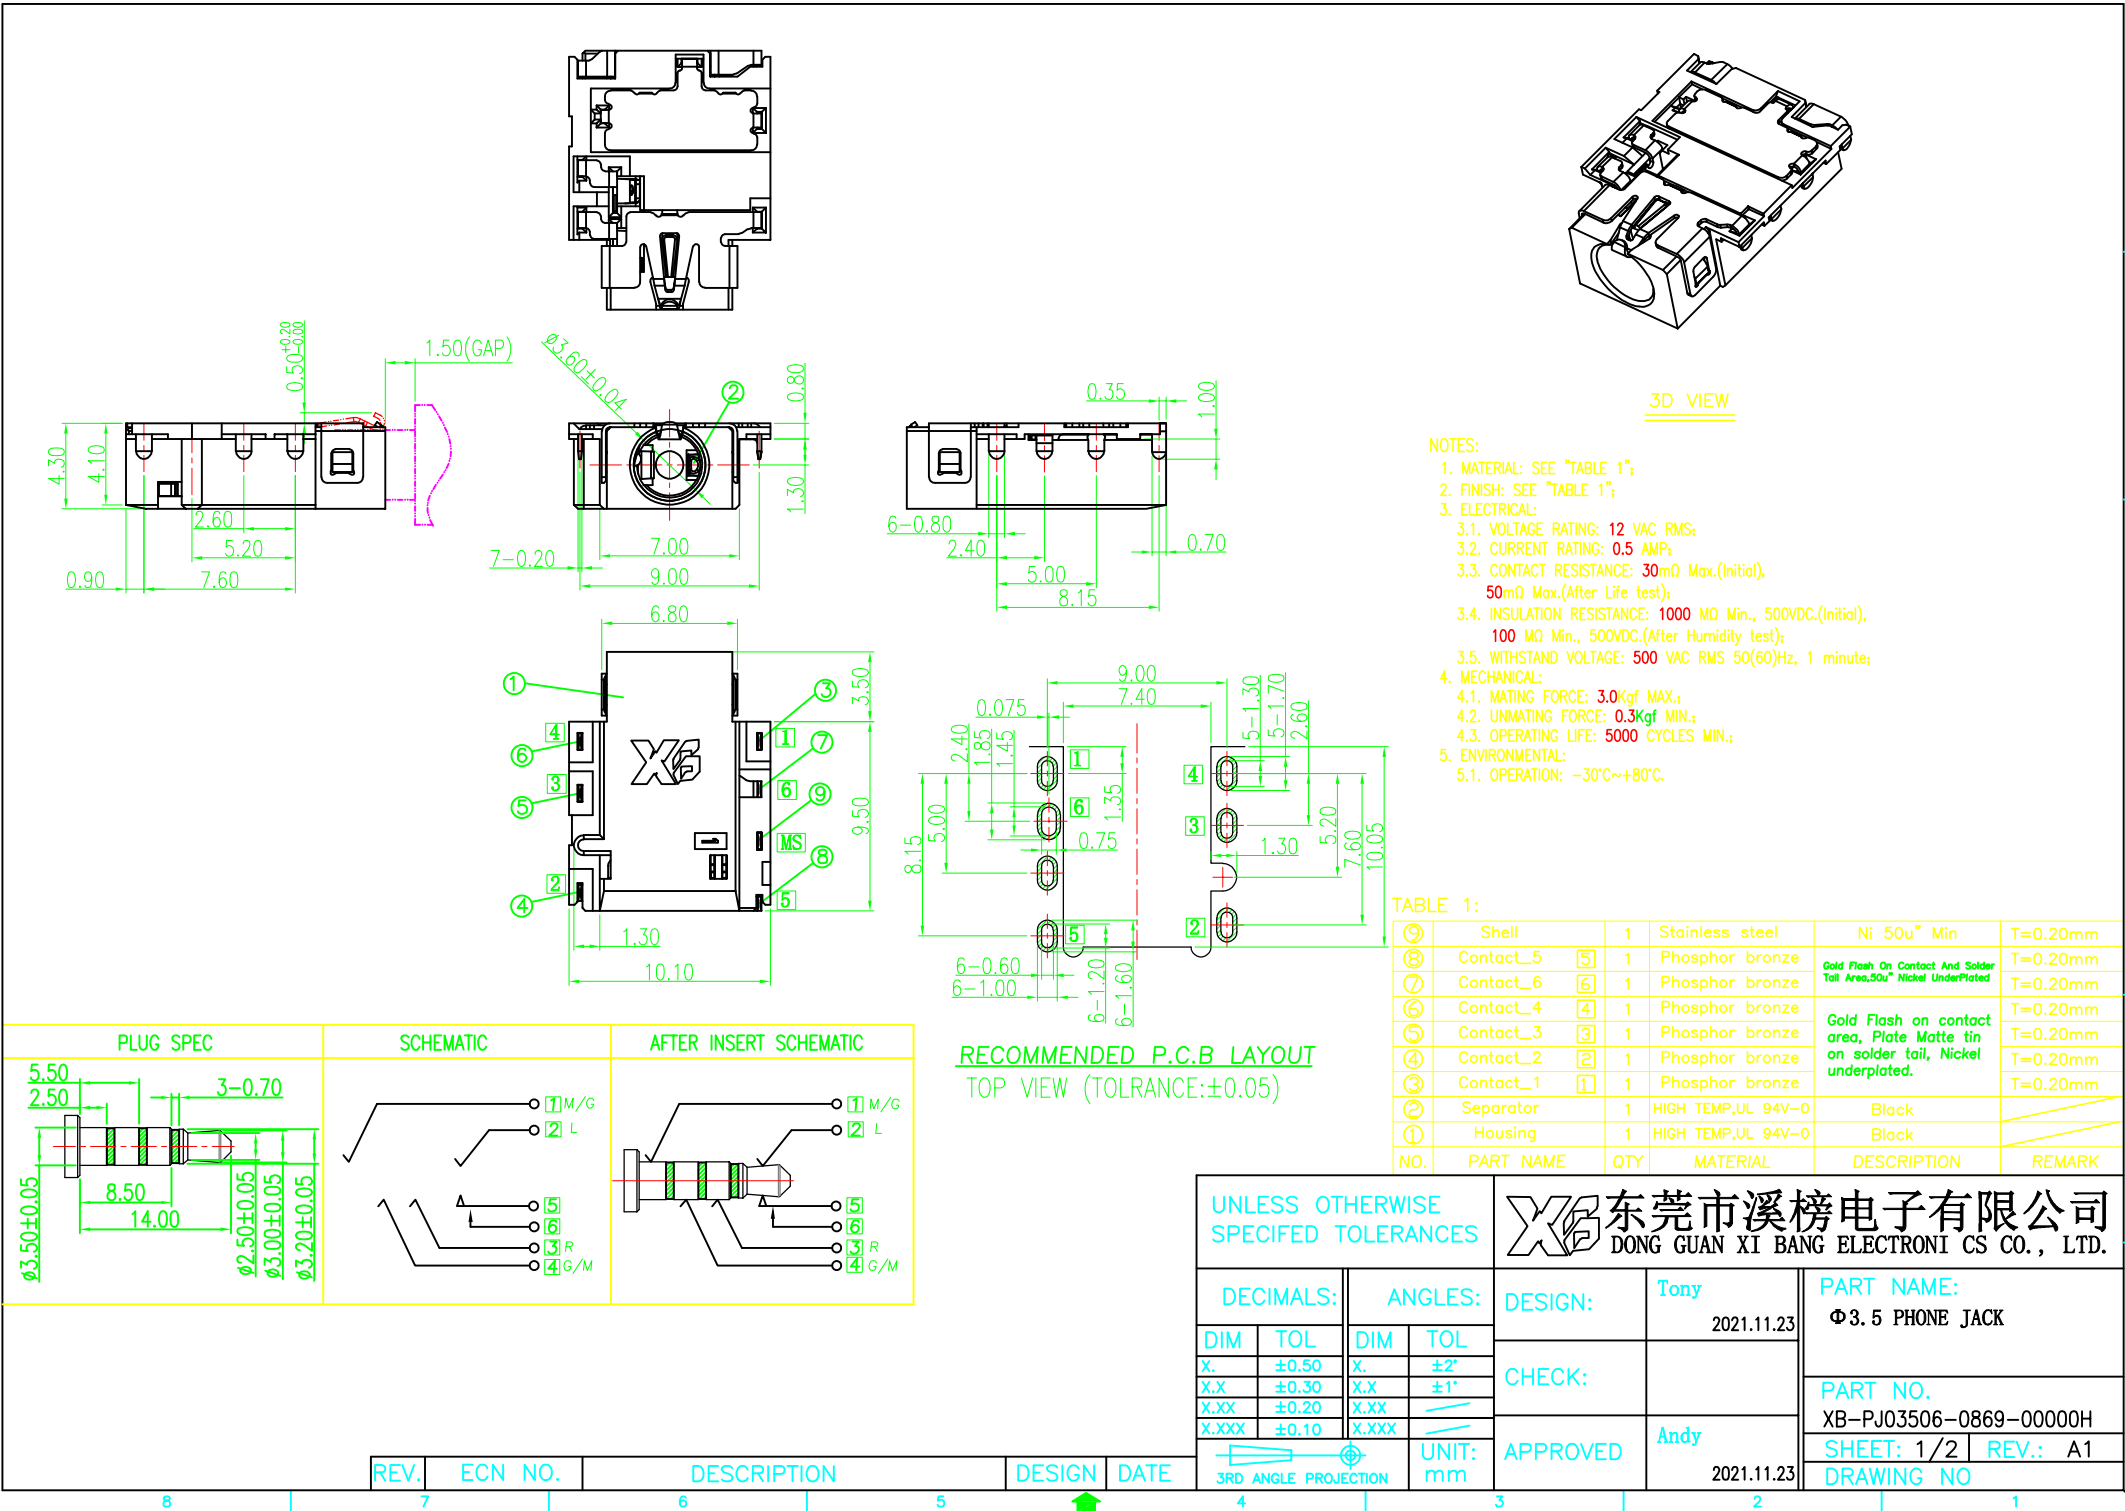

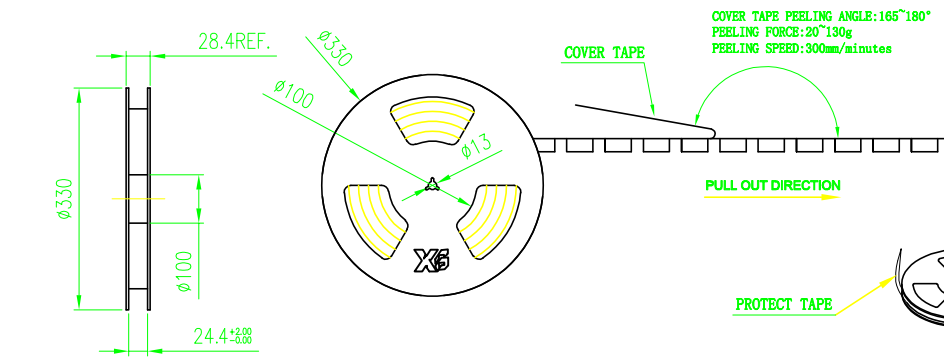

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g
PEELING SPEED:300mm/minutes

PULL OUT DIRECTION

PROTECT TAPE

10 DISK



VACUUM BAG

DRYER

FOLDER PAPER BOARD


OUTSIDE LABEL

CARTON

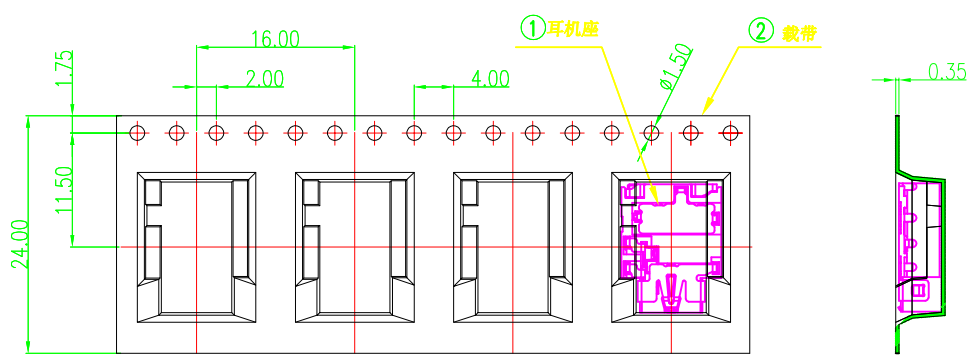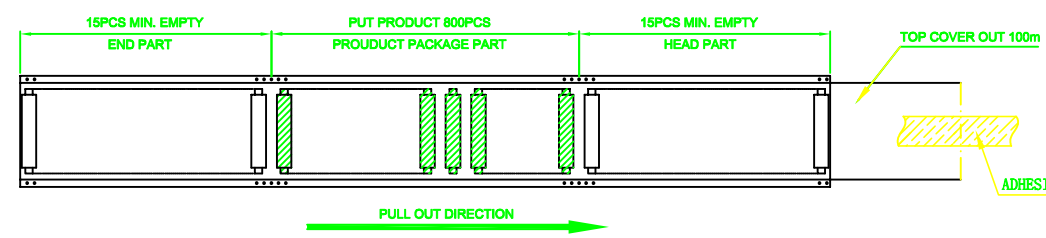

NOTES:

- Material requirements:
 - The carton material requirements for the K=A, Dimension is 350*340*310mm;
 - Reel materials for PET; size reel for 330*28.4.
- Packaging requirements:
 - The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
 - Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
 - Winding a protect tape around the reel, then stick it by adhesive tape;
 - Label should paste in the designated area of the reel;
 - Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
 - The tired folded 10 disks in the carton total 8000pcs;
 - Packed finished packing sealing, and in the outer carton label



CARTON SIZE

1 CARTON = 10 REEL = 8000 PRODUCT

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony 2021.11.23	PART NAME: Φ3.5 PHONE JACK	
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-PJ03506-0869-00000H	
X.	±0.50	X.	±2°			SHEET: 2/2	REV.: A1
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX	——				
X.XXX	±0.10	X.XXX	——	APPROVED	Andy 2021.11.23	DRAWING NO	
3RD ANGLE PROJECTION				UNIT: mm			
4		3		2		1	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------