








REV.	DESCRIPTION	DATE
2	MODIFY DRAWING	Mar. 19, 2019
3	MODIFY DRAWING	Apr. 24, 2019
4	MODIFY DRAWING	Apr. 30, 2019

### MATERIALS

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY,  
PLATING : GOLD PLATED ON CONTACT AREA,  
TIN PLATED ON SOLDER TAILS.
- SHELL : COPPER ALLOY,  
PLATING : NICKEL PLATED OVERALL.
- EMI SHIELD : STEEL.

### SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100MΩ MIN.AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- INSERTION FORCE : 4.5Kgf MAX.
- WITHDRAWING FORCE : 1Kgf ~ 4Kgf.

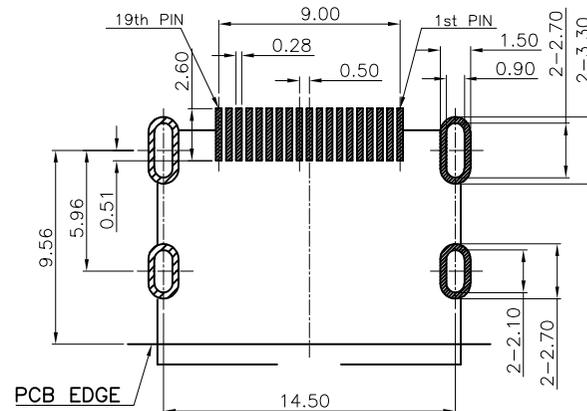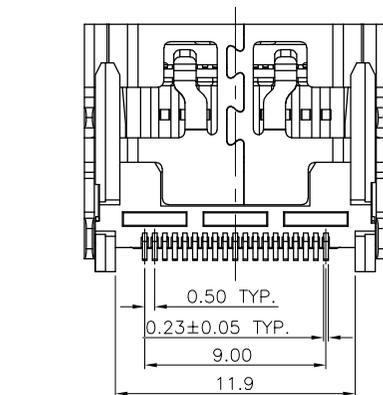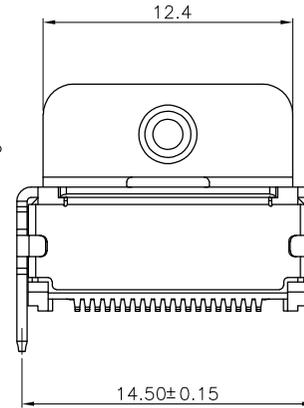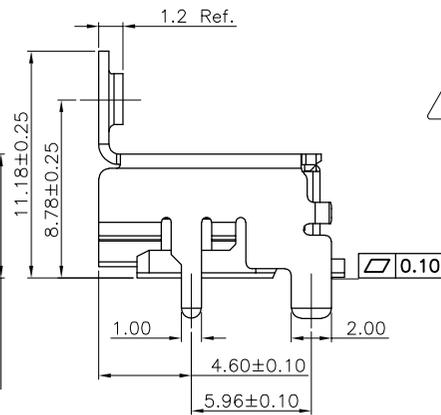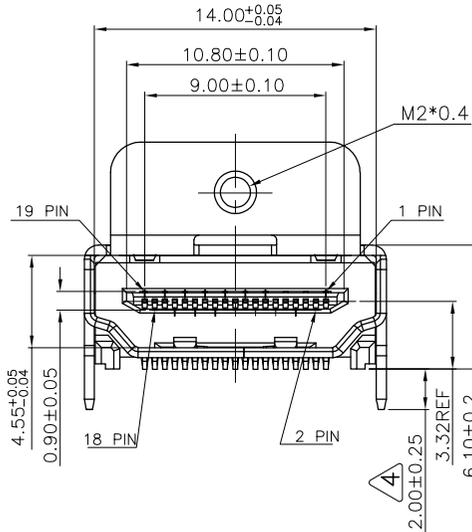
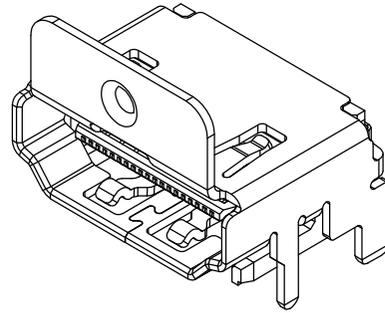
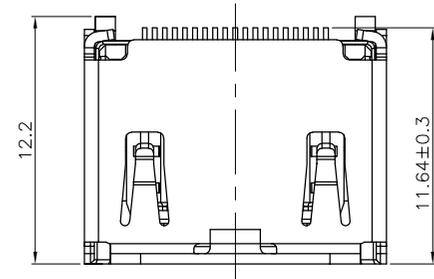


RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05  
TOP VIEW

<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD.	
APP'D <i>Stony</i>		NAME HDMI A 2.1 TYPE FEMALE WITH FLANGE(H=8.78)	
UNITS : mm		DRAW NO. XB-R369FA20	
SCALE NONE	SIZE A7	SHEET 1 OF 2	REV. 4

REV.	DESCRIPTION	DATE
2	MODIFY DRAWING	Mar. 19, 2019
3	MODIFY DRAWING	Apr. 24, 2019
4	MODIFY DRAWING	Apr. 30, 2019

3

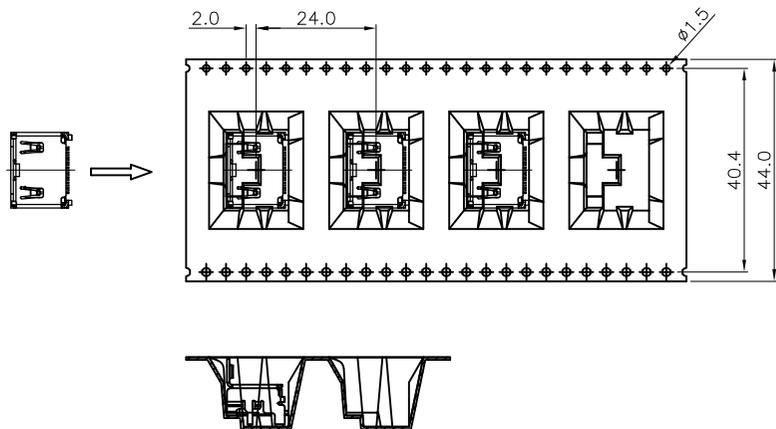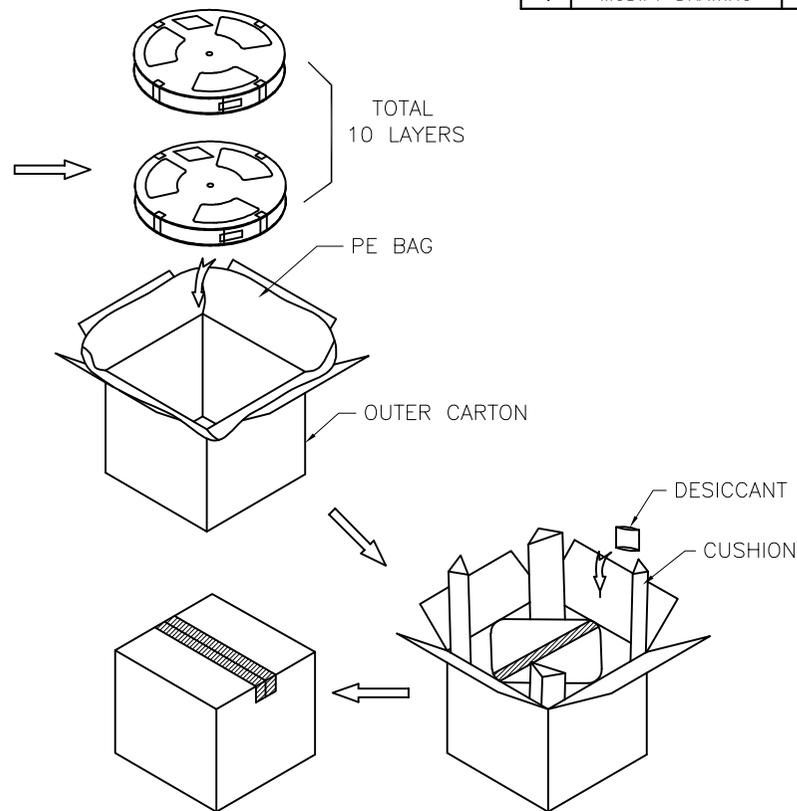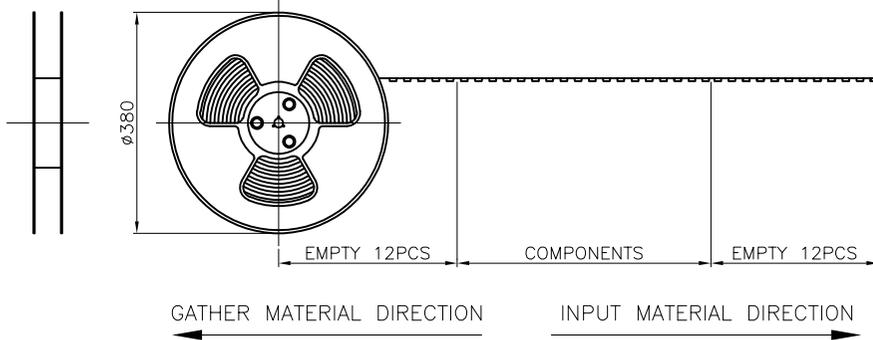

**PACKAGE :**

1. CORTON SIZE: 400x400x400mm (LxWxH)
2. 250 PCS/REEL
3. 10 REEL/CARTON = 2500PCS

<p><b>TOLERANCE</b>          .0=±0.25          .00=±0.15          .000=±0.05          ANG.=±3°</p>		<p><b>XB 东莞市溪榜电子有限公司</b>          DONG GUAN XI BANG ELECTRONI CS CO., LTD.</p>	
<p>APP'D <i>Flony</i></p>		<p>NAME HDMI A 2.1 TYPE FEMALE WITH FLANGE(H=8.68)</p>	
<p>PRODUCT SPEC. —</p>		<p>DRAW NO. XB-R369FA20</p>	
<p>UNITS : mm</p>	<p>SCALE NONE</p>	<p>SIZE A7</p>	<p>SHEET 2 OF 2</p>
		<p>REV. 4</p>	